

CFR 47 FCC PART 15 SUBPART C

TEST REPORT

For

Two-sided toy car

MODEL NUMBER: OF-Y8

REPORT NUMBER: 4792341462-4-RF-1

FCC ID: 2BXL9-OF-Y8

ISSUE DATE: Aug 31, 2026

Prepared for

**HONG KONG CLOUD WIN TECH CO., LIMITED
RM 64, ZONE D, 27/F, EGLTOWER, 83 HUNG TO ROAD, KWUNTONG HONG KONG**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244654

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	Aug 31, 2026	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	20dB Bandwidth	CFR 47 FCC §15.215 (c)	Pass
2	Radiated Emission	CFR 47 FCC §15.249 (a)(d)(e) CFR 47 FCC §15.205 and §15.209	Pass
3	Conducted Emission Test for AC Power Port	CFR 47 FCC §15.207	N/A (Note 3)
4	Antenna Requirement	CFR 47 FCC §15.203	Pass
Note 1: This test report is only published to and used by the applicant, and it is not for evidence purpose in China. Note 2: The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C > when <Simple Acceptance> decision rule is applied. Decision rule for statement of conformity: The measurement uncertainty is not taken into account for statement of conformity. Note 3: Conducted Emission Test for AC Power Port is not applicable, because the EUT is powered by alkaline dry cell battery. Note 4: For FCC, ANSI C63.10:2020 + Cor.1:2023 is also considered for the corresponding test item which is needed. *This test report shall not be relied upon or used in support of any Federal Communications Commission ("FCC") approval where the subject device constitutes "covered equipment" as defined under https://www.fcc.gov/supplychain/coveredlist, except where a Conditional Approval has been granted for the equipment. The responsible party, as defined in FCC rules, shall bear sole responsibility for reviewing the FCC Covered List and determining its applicability to the equipment.			

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	<i>8</i>
5.2. <i>CHANNEL LIST</i>	<i>8</i>
5.3. <i>MAXIMUM FIELD STRENGTH</i>	<i>8</i>
5.4. <i>TEST CHANNEL CONFIGURATION</i>	<i>9</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>9</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>9</i>
5.7. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>10</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	11
7. ANTENNA PORT TEST RESULTS	12
7.1. <i>20DB BANDWIDTH</i>	<i>12</i>
7.2. <i>DUTY CYCLE</i>	<i>16</i>
8. RADIATED TEST RESULTS.....	19
8.1. <i>FUNDAMENTAL EMISSION.....</i>	<i>26</i>
8.2. <i>RESTRICTED BANDEDGE</i>	<i>29</i>
8.3. <i>SPURIOUS EMISSIONS (1 GHZ ~ 3 GHZ)</i>	<i>33</i>
8.4. <i>SPURIOUS EMISSIONS (3 GHZ ~ 18 GHZ)</i>	<i>39</i>
8.5. <i>SPURIOUS EMISSIONS (9 KHZ ~ 30 MHZ).....</i>	<i>45</i>
8.6. <i>SPURIOUS EMISSIONS (18 GHZ ~ 26 GHZ)</i>	<i>48</i>
8.7. <i>SPURIOUS EMISSIONS (30 MHZ ~ 1 GHZ)</i>	<i>50</i>
9. ANTENNA REQUIREMENT	52

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: HONG KONG CLOUD WIN TECH CO., LIMITED
Address: RM 64, ZONE D, 27/F, EGLTOWER, 83 HUNG TO ROAD,
KWUNTONG HONG KONG

Manufacturer Information


Company Name: HONG KONG CLOUD WIN TECH CO., LIMITED
Address: RM 64, ZONE D, 27/F, EGLTOWER, 83 HUNG TO ROAD,
KWUNTONG HONG KONG

EUT Information

EUT Name: Two-sided toy car
Model: OF-Y8
Brand: OFDO
Sample Received Date: Aug 6,2026
Sample Status: Normal
Sample ID: 10035601
Date of Tested: Aug 10,2026 to Aug 31,2026

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass


Prepared By:



Rex Huang

Project Engineer Associate

Checked By:



Kebo zhang

Operations Leader

Approved By:



Stephen Guo

Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10:2020, ANSI/USEMCSC C63.10-2020/Cor 1-2023.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
------------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, Zhihui City Phase I, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and compared to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	4.36 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.47 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.65 dB (1 GHz ~ 18 GHz)
	4.73 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

Remark: For Radiated Emission measurements (200 MHz - 18 GHz), the EUT support table is made of Expanded Polystyrene (EPS). This material is characterized by a low dielectric constant, as recognized in CISPR 16-1-4, to minimize its influence on field strength measurements. This influence has been considered in the uncertainty budget.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Two-sided toy car
Model	OF-Y8

Frequency Range:	2419 MHz to 2475 MHz
Type of Modulation:	GFSK
Normal Test Voltage:	DC 3.0V (1.5V*2 AA Battery)

5.2. CHANNEL LIST

Channel	Frequency (MHz)
1	2419
2	2446
3	2475

5.3. MAXIMUM FIELD STRENGTH

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak field strength (dB μ V/m)	Maximum Average field strength (dB μ V/m)
GFSK	2419 ~ 2475	1-3[1]	91.67	77.39

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH 1(Low Channel), CH 2(MID Channel), CH 3(High Channel)	2419MHz, 2446 MHz, 2475 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2419 MHz ~ 2475 MHz Band				
Test Software Version		/		
Modulation Type	Transmit Antenna Number	Test Channel		
		CH 1	CH 2	CH 3
GFSK	1	Default	Default	Default

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	Maximum Antenna Gain (dBi)
1	2419-2475	Tinned Copper Antenna	2

Test Mode	Transmit and Receive Mode	Description
GFSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
Note: The value of the antenna gain was declared by customer		

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Specification
1	/	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/


ACCESSORY

Item	Equipment	Mfr/Brand	Model/Type No.	Specification	Series No.
/	/	/	/	/	/

TEST SETUP

The EUT have the engineer mode inside.

SETUP DIAGRAM FOR TEST



6. MEASURING EQUIPMENT AND SOFTWARE USED

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Signal Analyzer	R&S	FSV40	101117	Sep.12, 2025	Sep.11, 2026
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130958	Dec. 13, 2024	Dec. 12, 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
EMI Measurement Receiver	ROHDE & SCHWARZ	ESR26	101377	Sep. 12, 2025	Sep. 11, 2026
Horn Antenna	TDK	HRN-0118	130940	Dec.10, 2024	Dec.11, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
Low Noise Amplifier	/	RL-AMP-1-18G	2508070085	Oct 29, 2025	Oct 28, 2026
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Sep.12, 2025	Sep.11, 2026
Highpass Filter	Wainwright	WHKX3.0/18G-12SS	124	Jun.01, 2026	May.31, 2027
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Jun.01, 2026	May.31, 2027
Software					
Description		Manufacturer	Name	Version	
Test Software for Radiated Emissions		Farad	EZ-EMC	Ver. UL-3A1	

7. ANTENNA PORT TEST RESULTS

7.1. 20DB BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.249) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.215 (c)	20dB Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the occupied bandwidth
VBW	approximately 3×RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB/99% relative to the maximum level measured in the fundamental emission.

TEST SETUP

Above 1 GHz

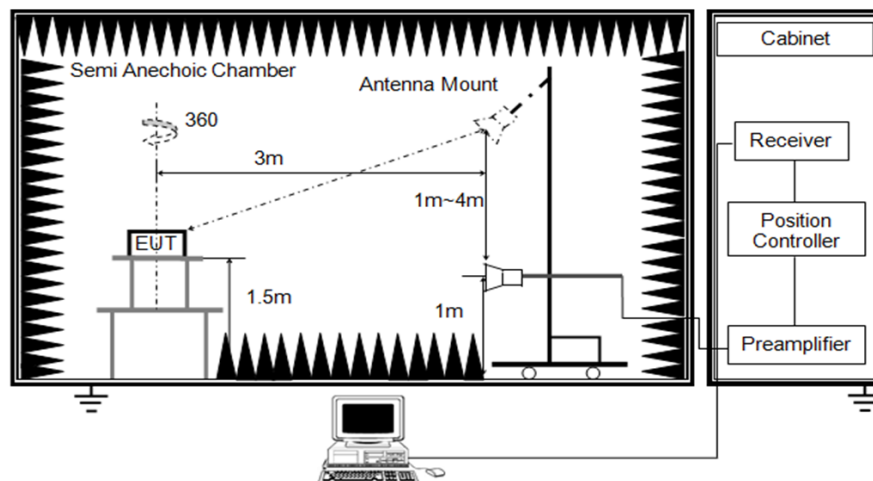


TEST ENVIRONMENT


Temperature	23.2°C	Relative Humidity	56.9%
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.0V

TEST RESULTS


Frequency (MHz)	20dB Bandwidth (MHz)	Result
2419	1.219	PASS

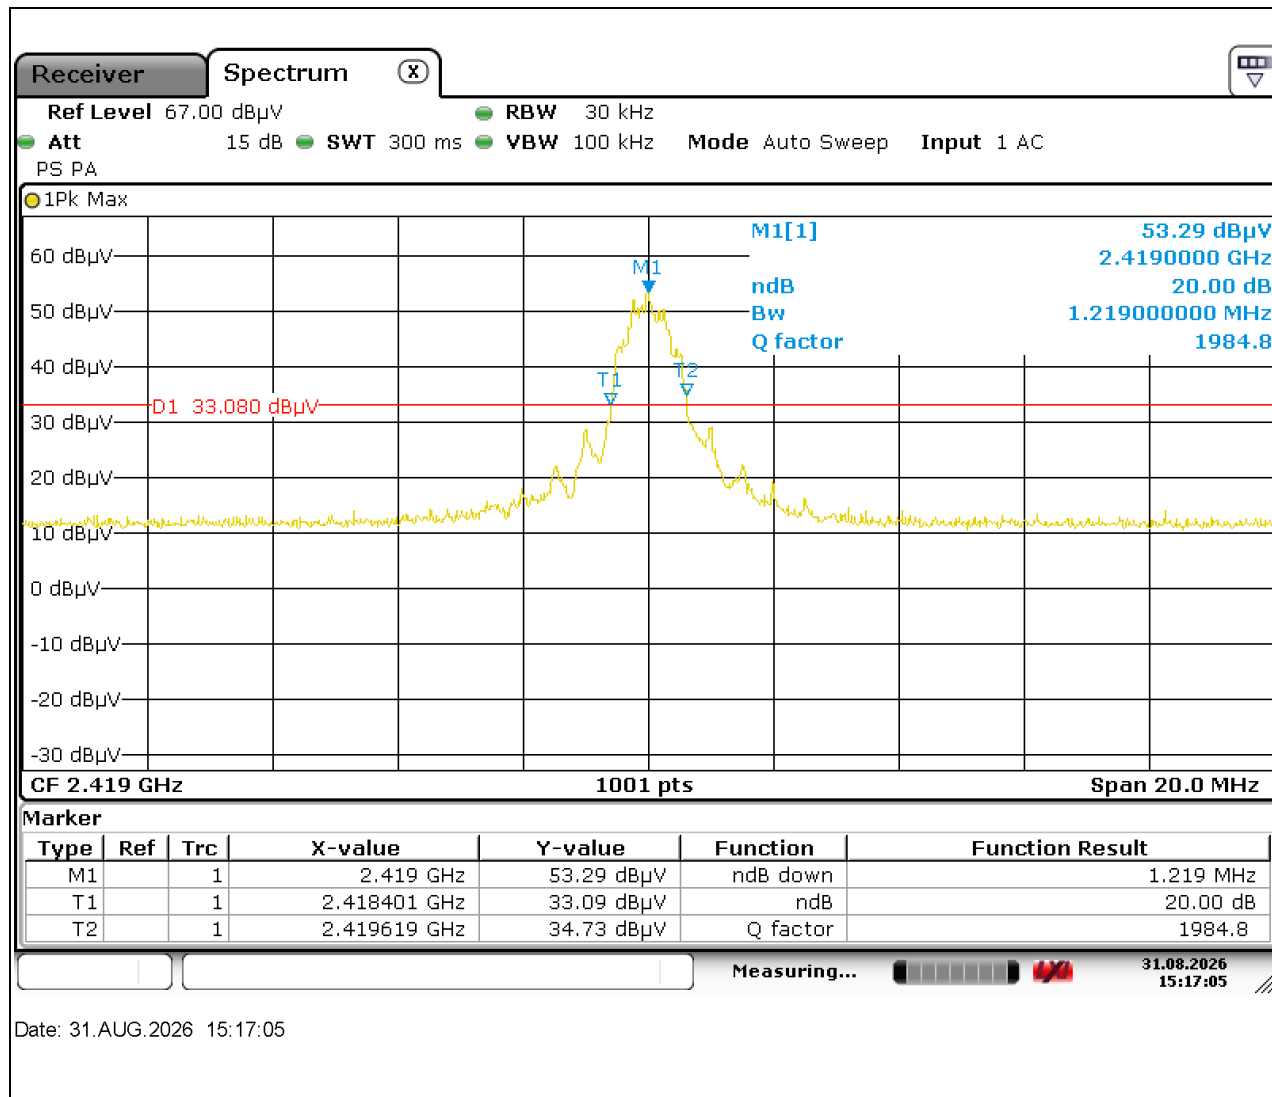

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2446	1.219	PASS

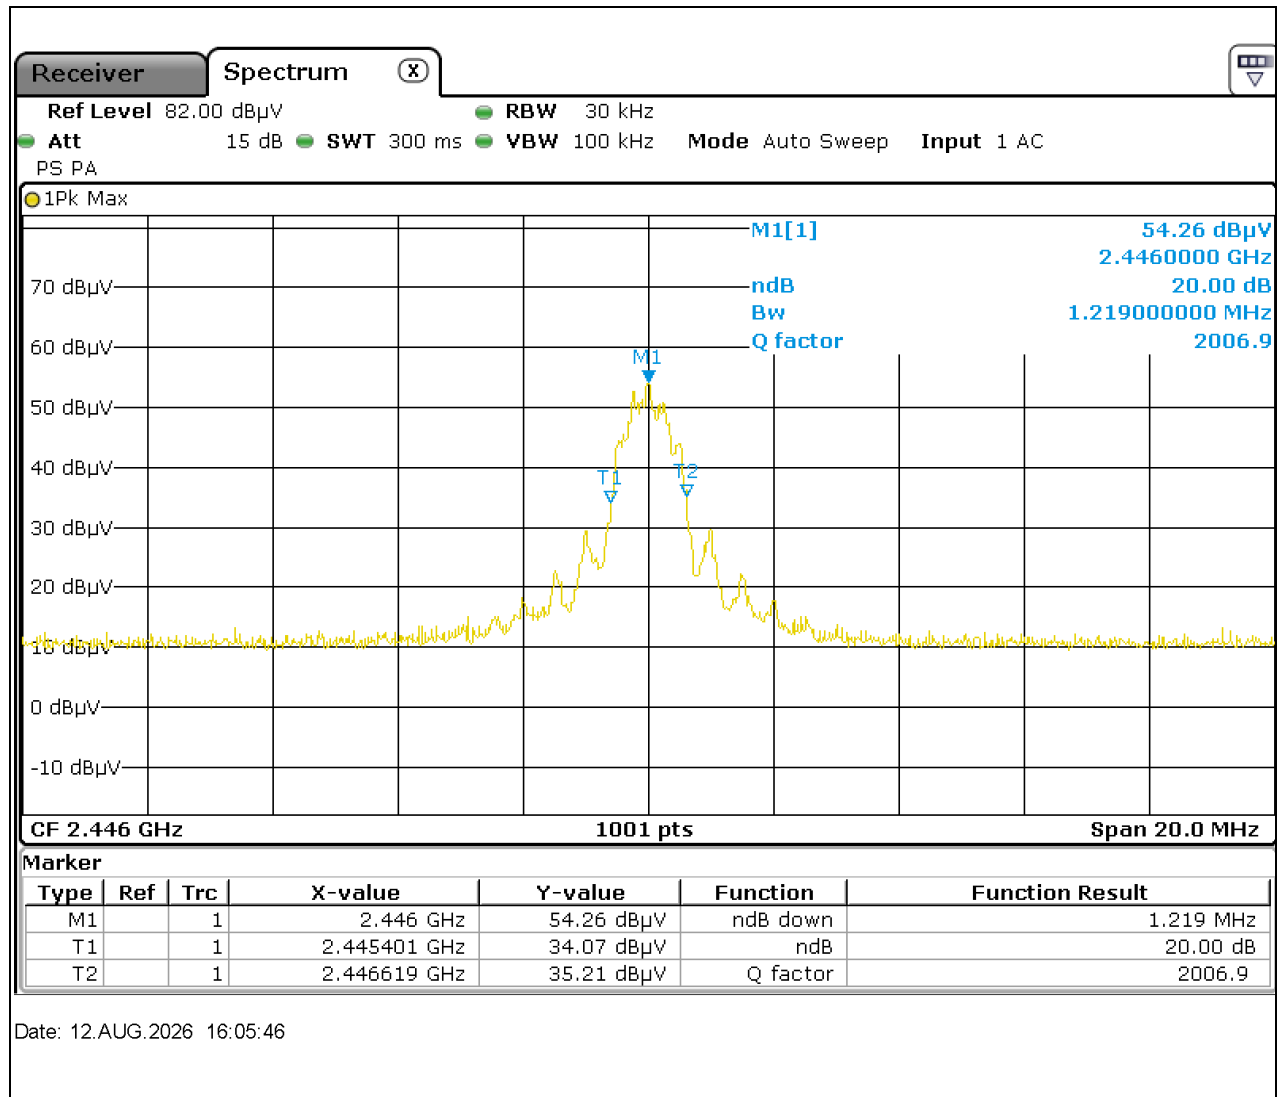

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2475	1.219	PASS

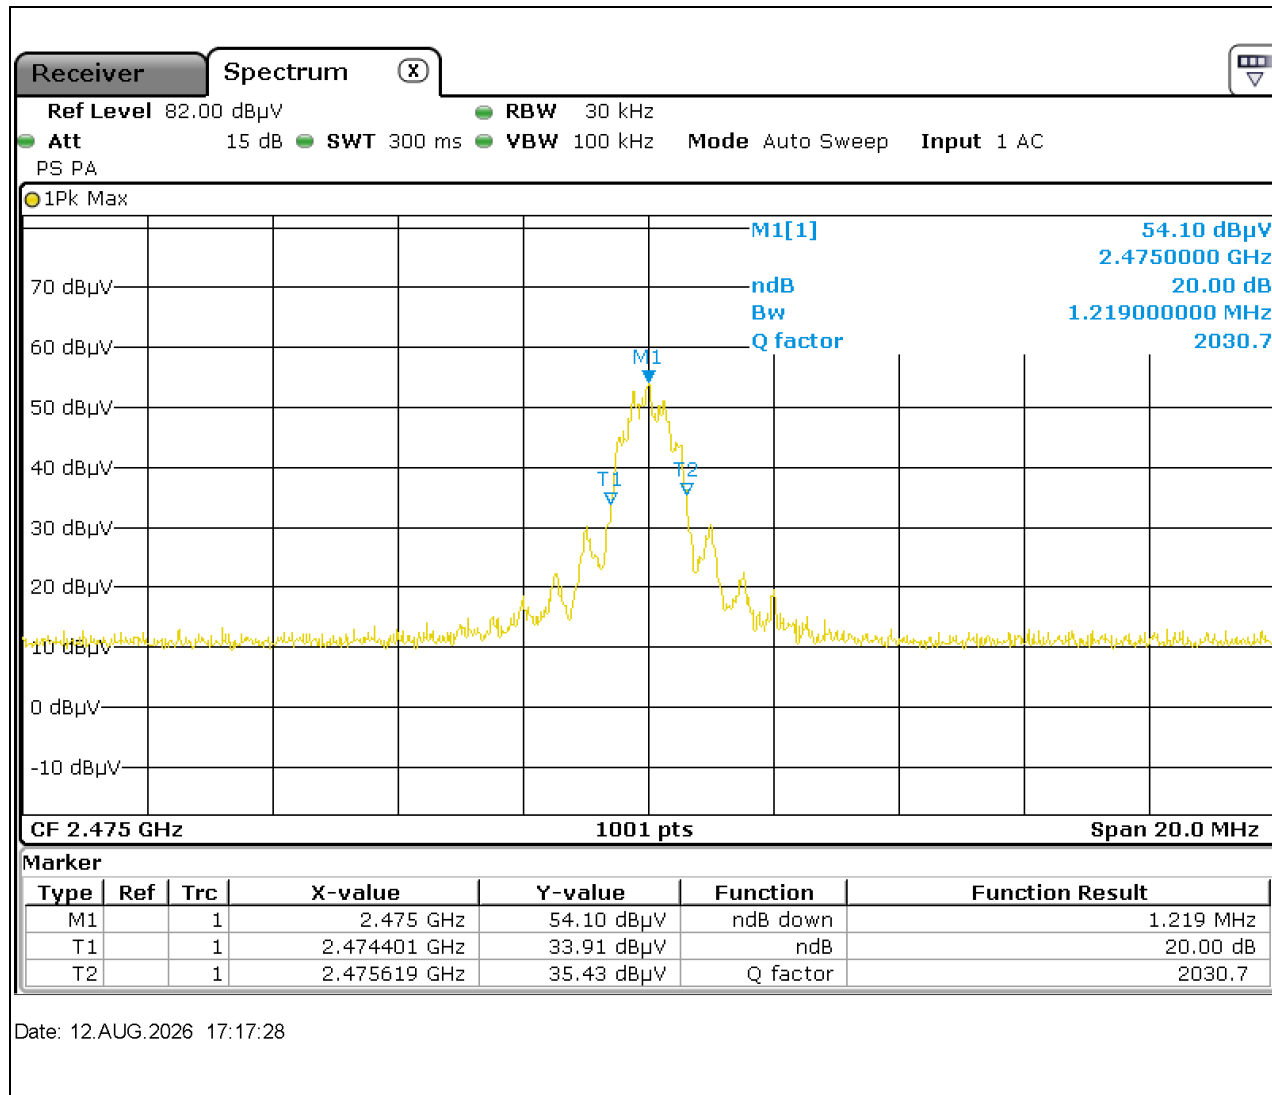

7.2. DUTY CYCLE

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

Above 1 GHz

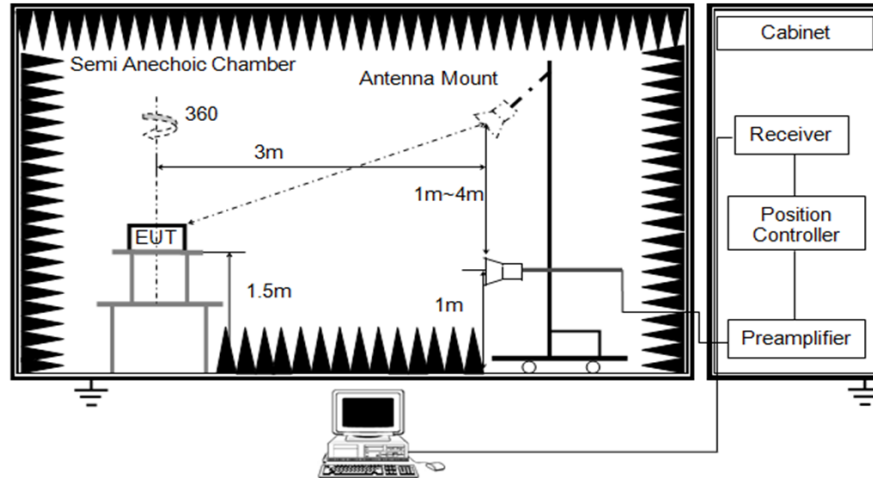

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	56.9%
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.0V

TEST RESULTS

The averaging time	Mode	Total Ton times (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)
100ms	GFSK	19.32	100	0.1932	19.32	-14.28

Note: Duty Cycle Correction Factor= $20\log(x)$.
Where: x is Duty Cycle


Note: All modes and buttons had been tested, but only the worst data was recorded in the report.

Note: On Time=Pulse width $\times$ Pulses per Period


Pulse is the single transmitting time between M1 and D1 shown in the first graph below.

Pulses per Period is shown in the second graph below.

As a result, On Time= $0.230\text{ms} \times 4 \times 21 = 19.32\text{ms}$

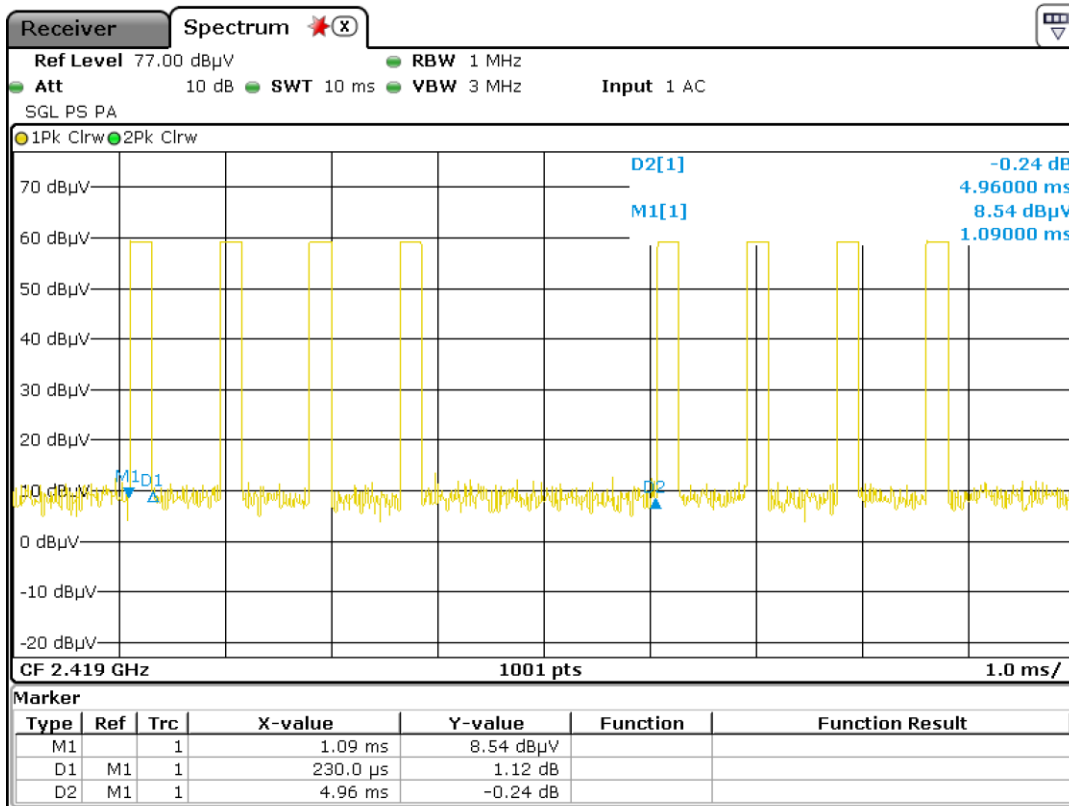

Date: 12.AUG.2026 15:48:10

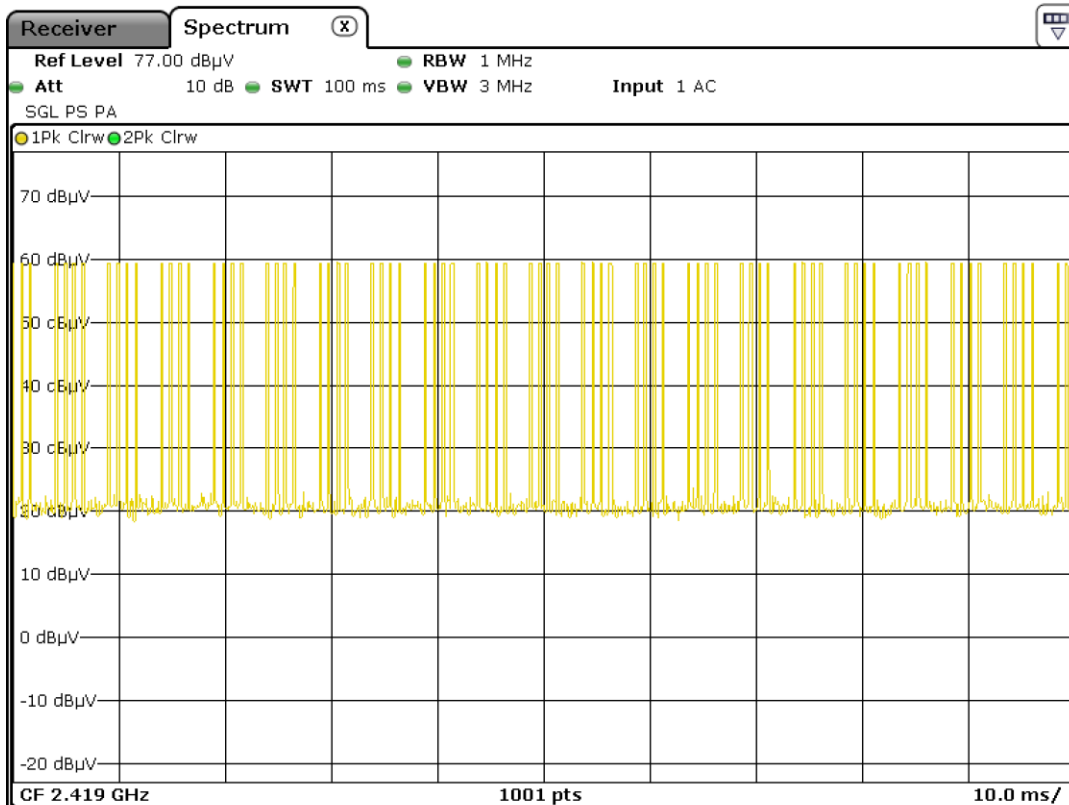

Date: 12.AUG.2026 15:48:39

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205, §15.209 and §15.249 (a).

Radiation Disturbance Test Limit for FCC

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC field strength of emissions from intentional radiators operated within these frequency bands			
Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
902 - 928	50 mV/m (94 dBuV/m)	500 uV/m (54 dBuV/m)	3
2400 – 2483.5	50 mV/m (94 dBuV/m)	500 uV/m (54 dBuV/m)	3
5725 – 5875	50 mV/m (94 dBuV/m)	500 uV/m (54 dBuV/m)	3

Note: The EUT has the same power when push the control direction of different strength.

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made

to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

The setting of the spectrum analyzer

For Restricted Bandedge and Spurious Emissions

RBW	1 MHz
VBW	3 MHz
Sweep	Auto
Detector	Peak
Trace	Max hold


For field strength of fundamental emission

RBW	$\geq 20\text{dB Bandwidth or } 99\% \text{ Occupied Bandwidth, whichever is greater}$
VBW	$3 \times \text{RBW}$
Sweep	Auto
Detector	Peak
Trace	Max hold

Note: According to test result of Clause 7.1, RBW is set as 3MHz.

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements. AVG Result=Peak Result + Duty Cycle Correction Factor. For the + Duty Cycle Correction Factor please refer to clause 7.2. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

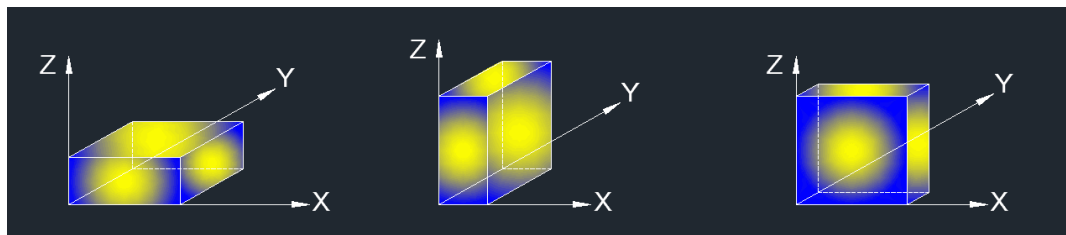

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge and field strength of fundamental emission:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG Result=Peak Result + Duty Cycle Correction Factor.
5. For the transmitting duration, please refer to clause 7.2.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG Result=Peak Result + Duty Cycle Correction Factor.
5. For the transmitting duration, please refer to clause 7.2.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG Result=Peak Result + Duty Cycle Correction Factor.
5. For the transmitting duration, please refer to clause 7.2.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes, channels and antennas have been tested, only the worst data was recorded in the report.


TEST SETUP

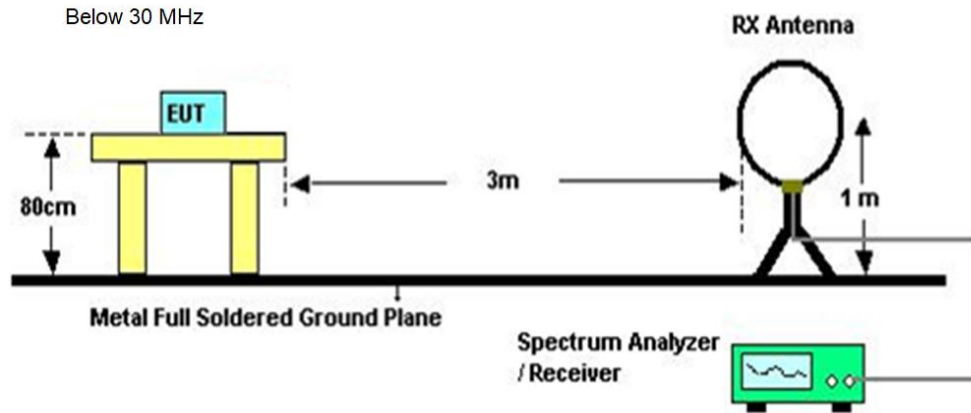

Below 1 GHz and above 30 MHz

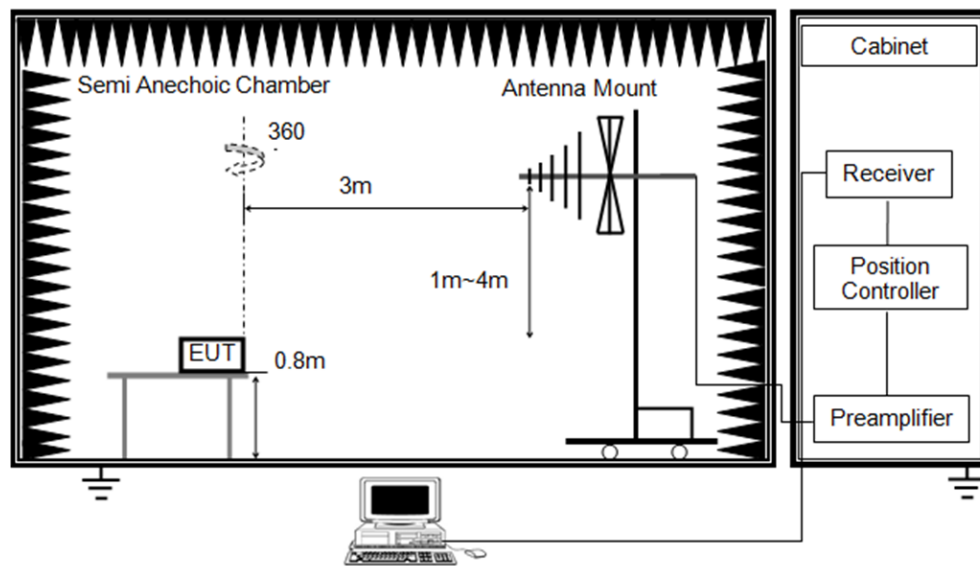

Above 1 GHz

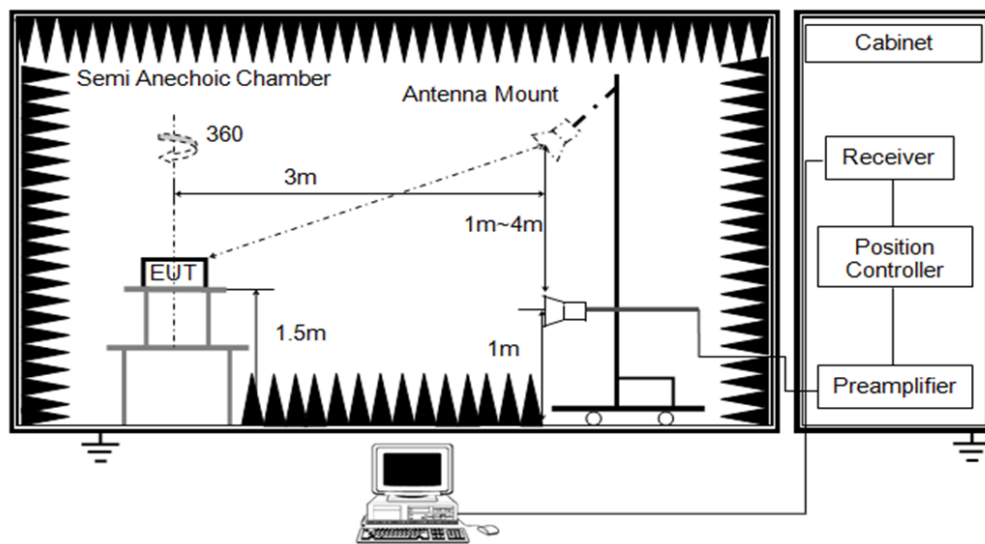


TEST ENVIRONMENT

Temperature	22.6°C	Relative Humidity	62.7%
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.0V

TEST RESULTS

8.1. FUNDAMENTAL EMISSION


Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Vertical	Test Voltage:	DC 3.0V

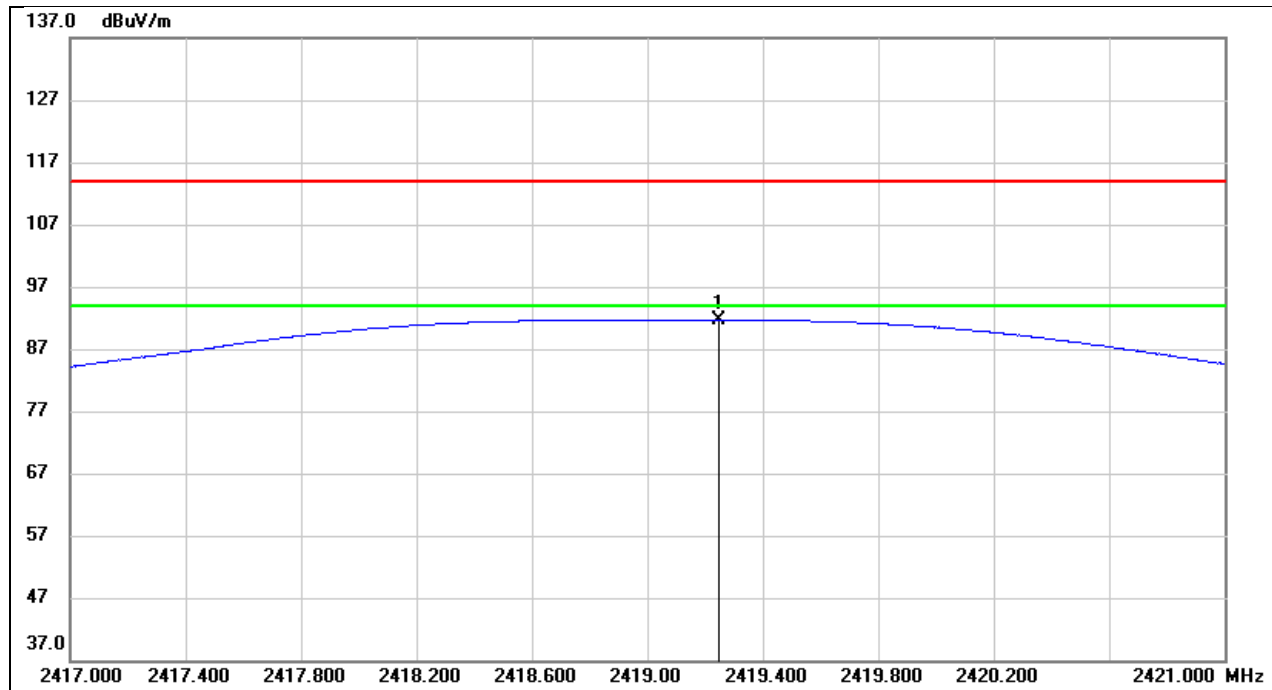

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2419.248	59.56	32.11	91.67	114.00	-22.33	peak
2	2419.248	/	/	77.39	94.00	-16.61	AVG

Note: AVG Result=Peak Result + Duty Cycle Correction Factor
Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
Margin = Result - Limit

Test Mode:	2.4GHz	Frequency(MHz):	2446
Polarity:	Vertical	Test Voltage:	DC 3.0V

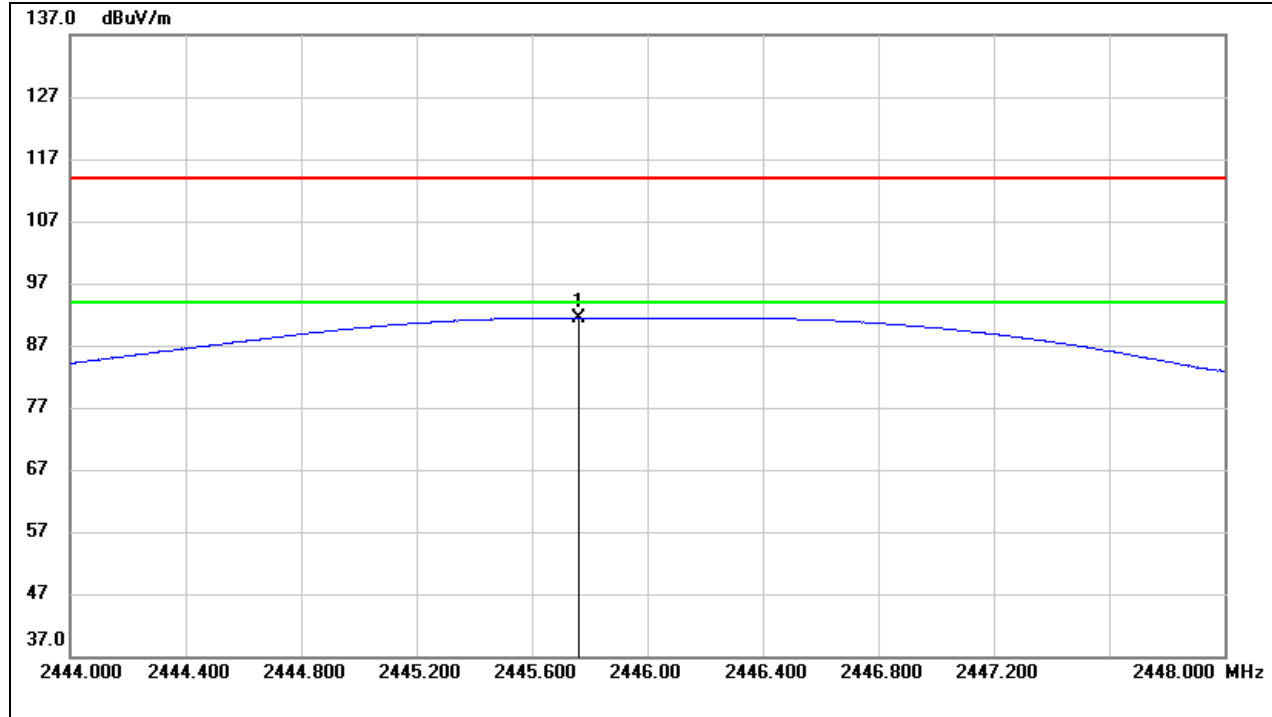


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2445.760	59.29	32.21	91.50	114.00	-22.50	peak
2	2445.760	/	/	77.22	94.00	-16.78	AVG

Note: AVG Result=Peak Result + Duty Cycle Correction Factor

Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

Margin = Result - Limit

Test Mode:	2.4GHz	Frequency(MHz):	2475
Polarity:	Vertical	Test Voltage:	DC 3.0V

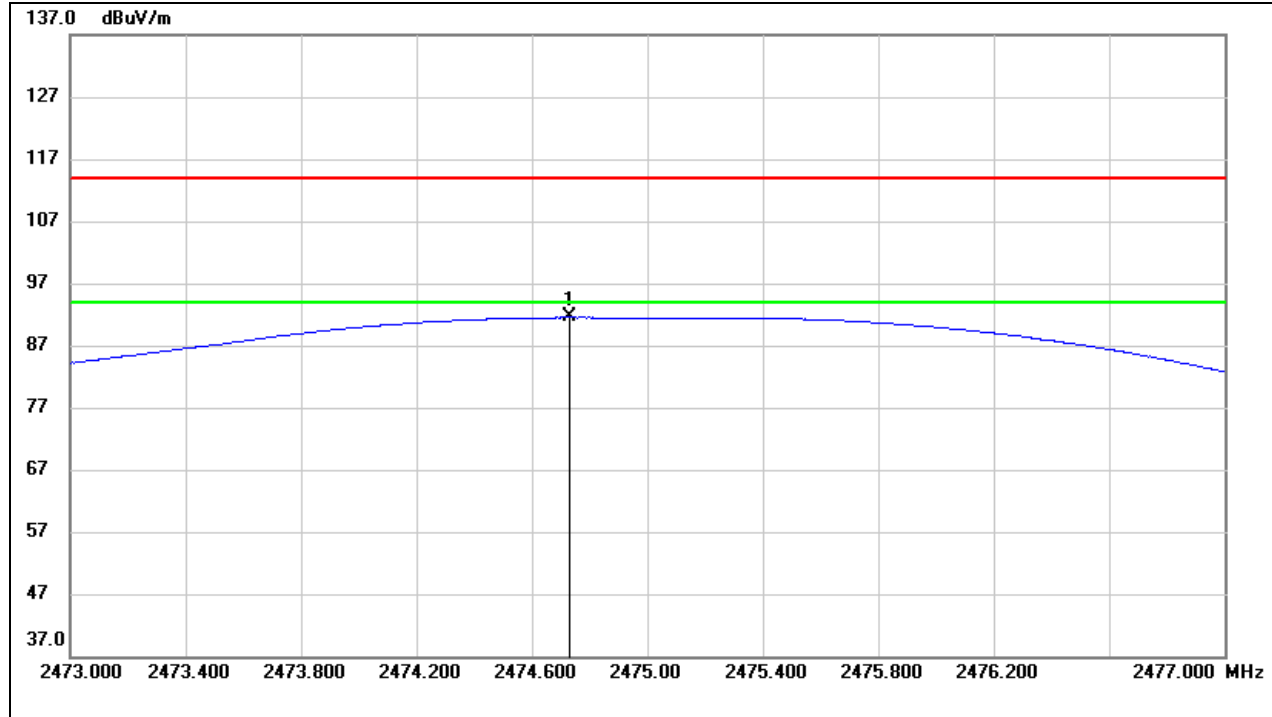


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2474.728	59.21	32.32	91.53	114.00	-22.47	peak
2	2474.728	/	/	77.25	94.00	-16.75	AVG

Note: AVG Result=Peak Result + Duty Cycle Correction Factor
Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
Margin = Result - Limit

8.2. RESTRICTED BANDEDGE

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Horizontal	Test Voltage:	DC 3.0V

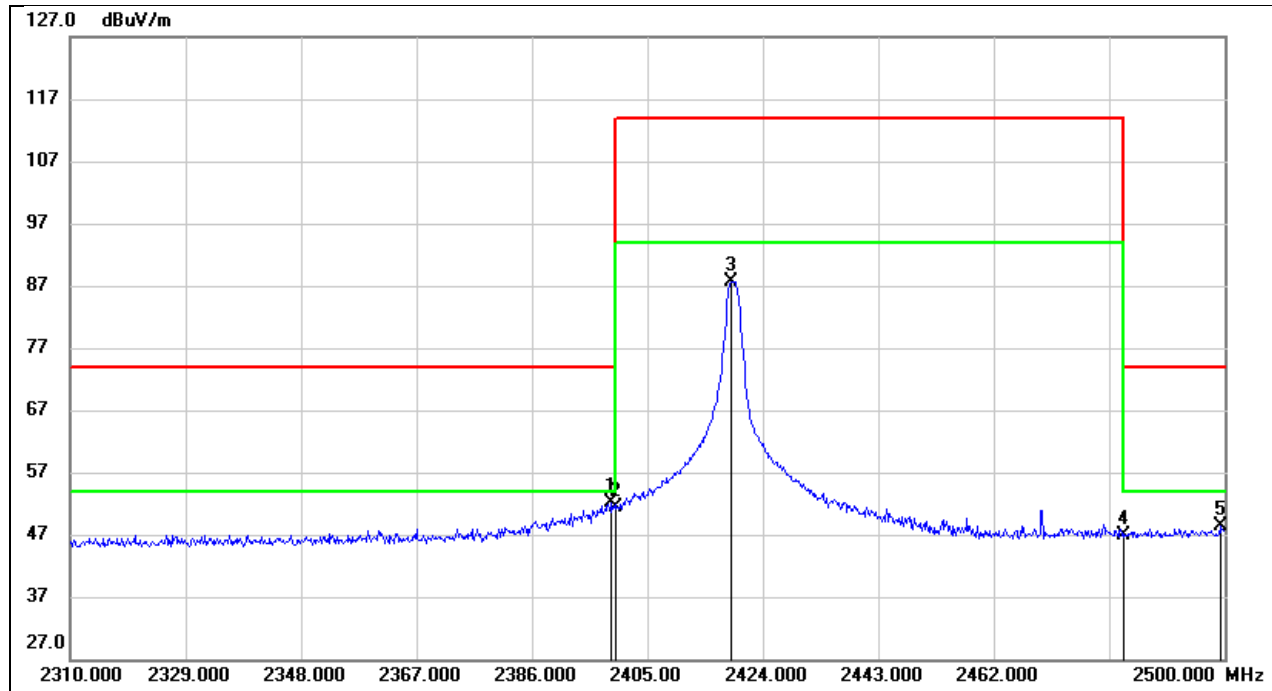


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2399.110	20.14	32.04	52.18	74.00	-21.82	peak
2	2400.000	19.30	32.04	51.34	74.00	-22.66	peak
3	2418.870	55.64	32.11	87.75	114.00	-26.25	Fundamental
4	2483.500	14.62	32.35	46.97	74.00	-27.03	peak
5	2499.240	15.95	32.41	48.36	74.00	-25.64	peak

Note: AVG Result=Peak Result + Duty Cycle Correction Factor

Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

Margin = Result - Limit

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Vertical	Test Voltage:	DC 3.0V

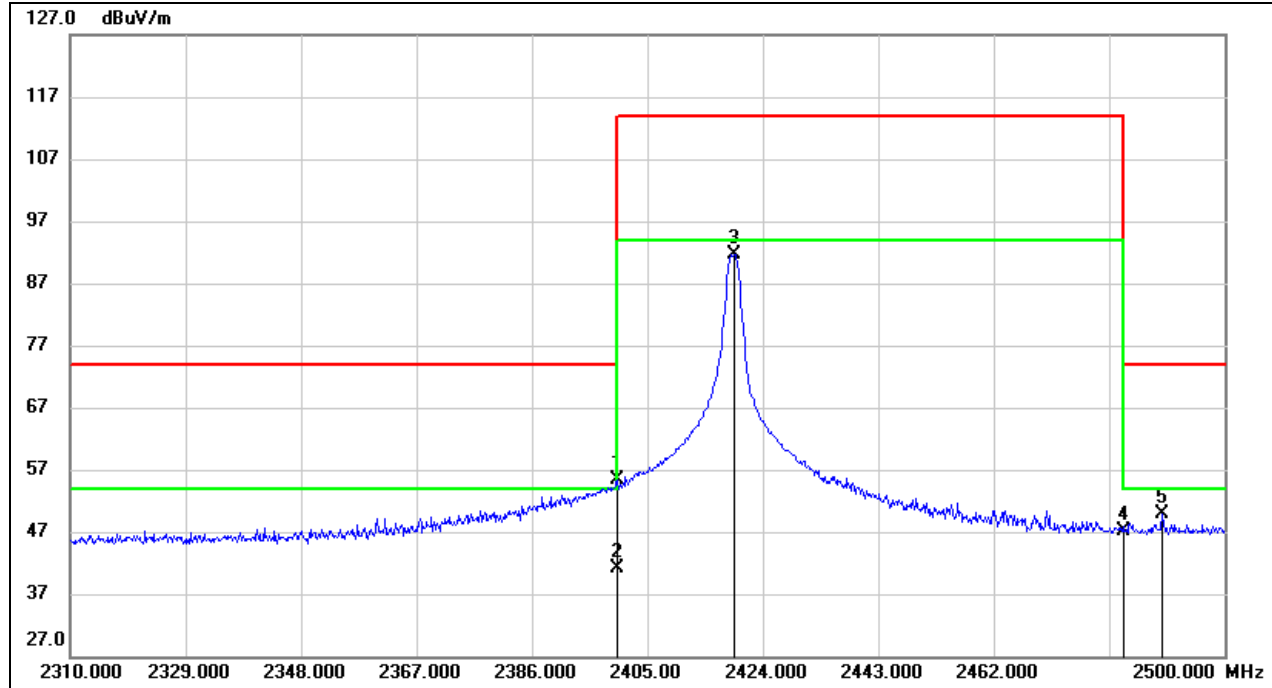

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	23.44	32.04	55.48	74.00	-18.52	peak
2	2400.000	/	/	41.20	54.00	-12.80	AVG
3	2419.250	59.46	32.11	91.57	114.00	-22.43	Fundamental
4	2483.500	14.73	32.35	47.08	74.00	-26.92	peak
5	2489.740	17.56	32.38	49.94	74.00	-24.06	peak


Note: The Duty cycle of 2400MHz are the same as fundamental(2419MHz). AVG value of 2400MHz can be calculated as Peak Result + Duty Cycle Correction Factor.

Note: AVG Result=Peak Result + Duty Cycle Correction Factor

Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

Margin = Result - Limit

Test Mode:	2.4GHz	Frequency(MHz):	2446
Polarity:	Vertical	Test Voltage:	DC 3.0V

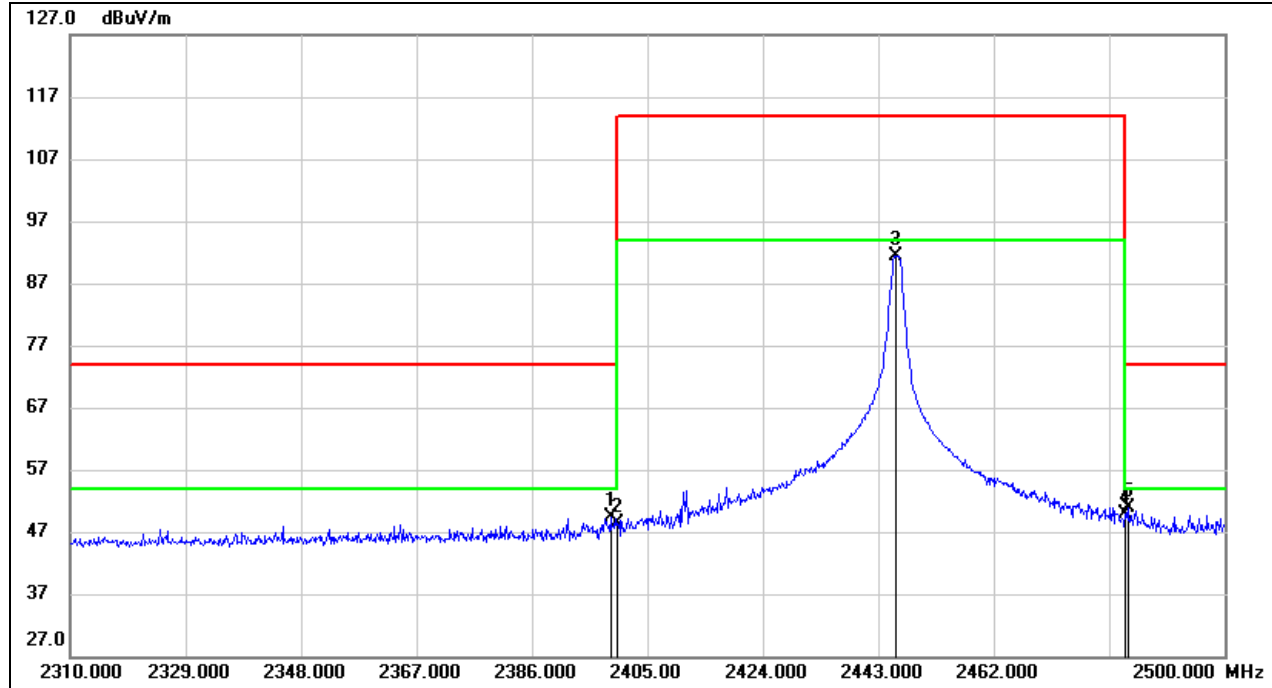


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2398.920	17.24	32.04	49.28	74.00	-24.72	peak
2	2400.000	16.41	32.04	48.45	74.00	-25.55	peak
3	2445.850	59.21	32.21	91.42	114.00	-22.58	Fundamental
4	2483.500	17.51	32.35	49.86	74.00	-24.14	peak
5	2484.040	18.57	32.35	50.92	74.00	-23.08	peak

Note: AVG Result=Peak Result + Duty Cycle Correction Factor

Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

Margin = Result - Limit

Test Mode:	2.4GHz	Frequency(MHz):	2475
Polarity:	Vertical	Test Voltage:	DC 3.0V

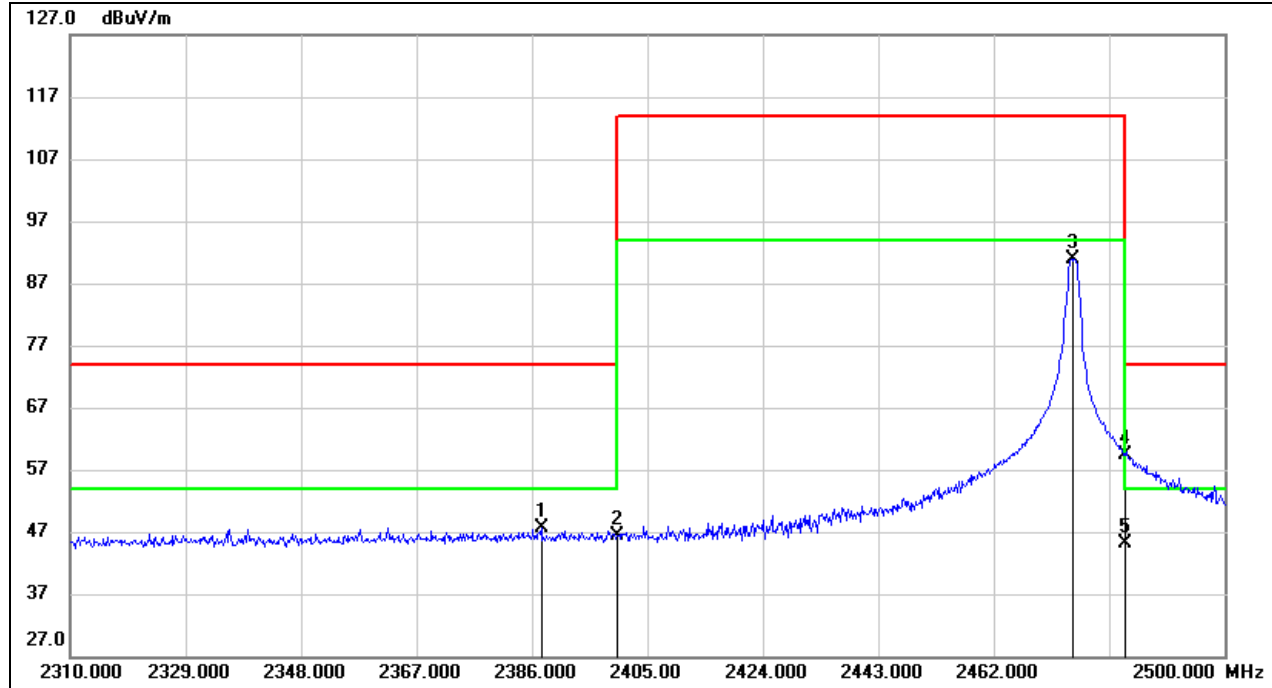

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.520	15.58	31.98	47.56	74.00	-26.44	peak
2	2400.000	14.40	32.04	46.44	74.00	-27.56	peak
3	2474.920	58.50	32.32	90.82	114.00	-23.18	Fundamental
4	2483.500	26.99	32.35	59.34	74.00	-14.66	peak
5	2483.500	/	/	45.06	54.00	-8.94	AVG

Note: The Duty cycle of 2483.5MHz are the same as fundamental(2475MHz). AVG value of 2483.5MHz can be calculated as Peak Result + Duty Cycle Correction Factor.


Note: AVG Result=Peak Result + Duty Cycle Correction Factor

Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

Margin = Result - Limit

8.3. SPURIOUS EMISSIONS (1 GHZ ~ 3 GHZ)

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Horizontal	Test Voltage:	DC 3.0V

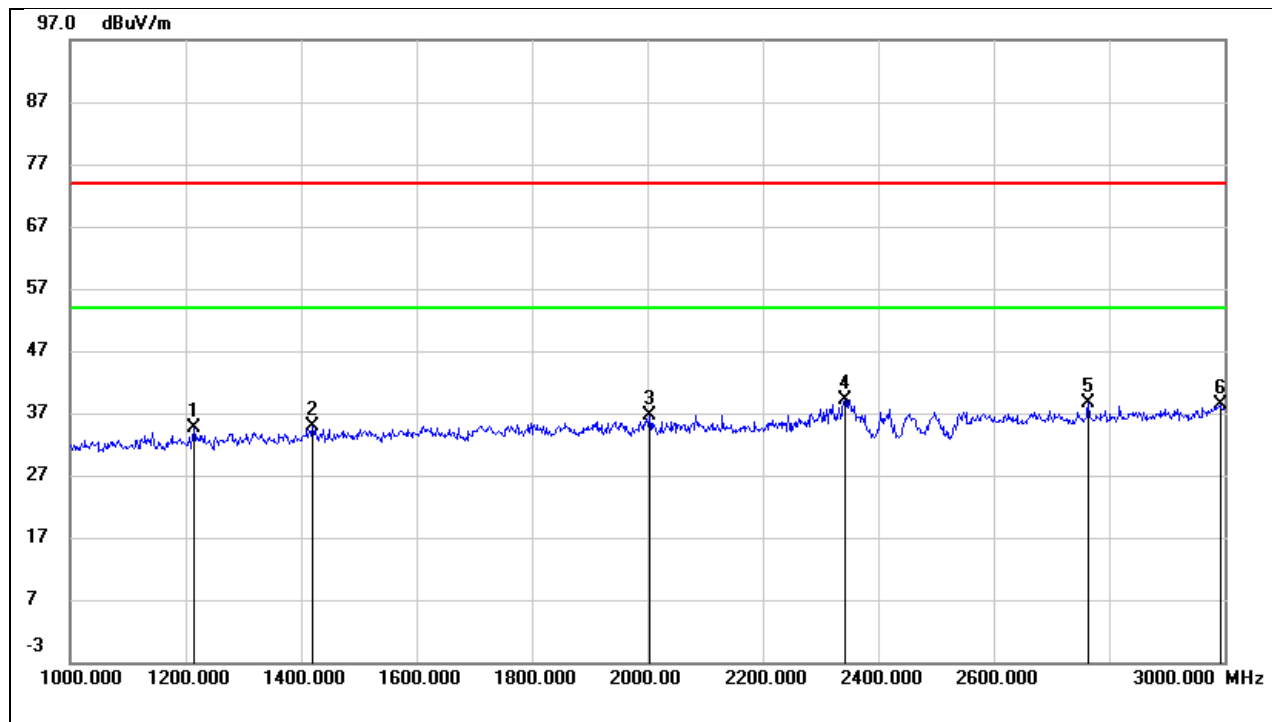


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1214.000	47.45	-12.94	34.51	74.00	-39.49	peak
2	1420.000	46.95	-12.00	34.95	74.00	-39.05	peak
3	2004.000	46.44	-9.71	36.73	74.00	-37.27	peak
4	2342.000	48.01	-8.82	39.19	74.00	-34.81	peak
5	2764.000	45.56	-6.94	38.62	74.00	-35.38	peak
6	2992.000	44.55	-6.07	38.48	74.00	-35.52	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit - Result
3. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Vertical	Test Voltage:	DC 3.0V

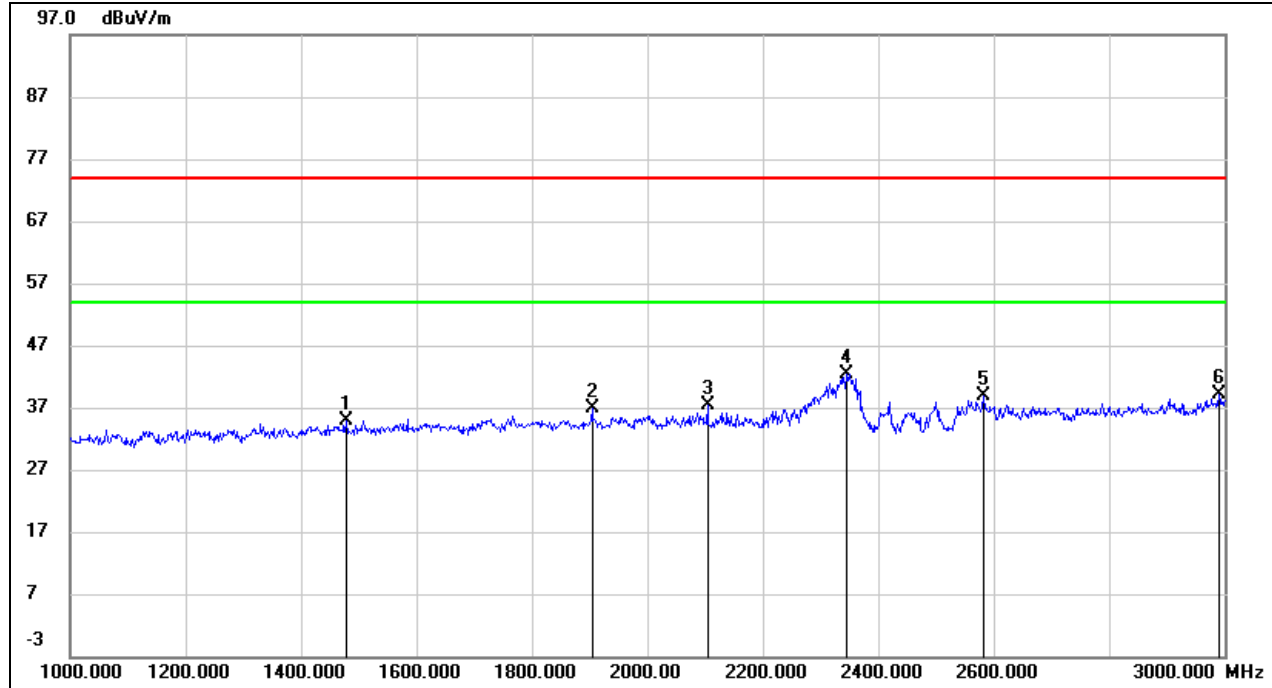


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1478.000	46.60	-11.74	34.86	74.00	-39.14	peak
2	1904.000	47.11	-10.13	36.98	74.00	-37.02	peak
3	2104.000	47.02	-9.71	37.31	74.00	-36.69	peak
4	2346.000	51.23	-8.80	42.43	74.00	-31.57	peak
5	2582.000	46.54	-7.61	38.93	74.00	-35.07	peak
6	2990.000	45.09	-6.08	39.01	74.00	-34.99	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit - Result
3. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2446
Polarity:	Horizontal	Test Voltage:	DC 3.0V

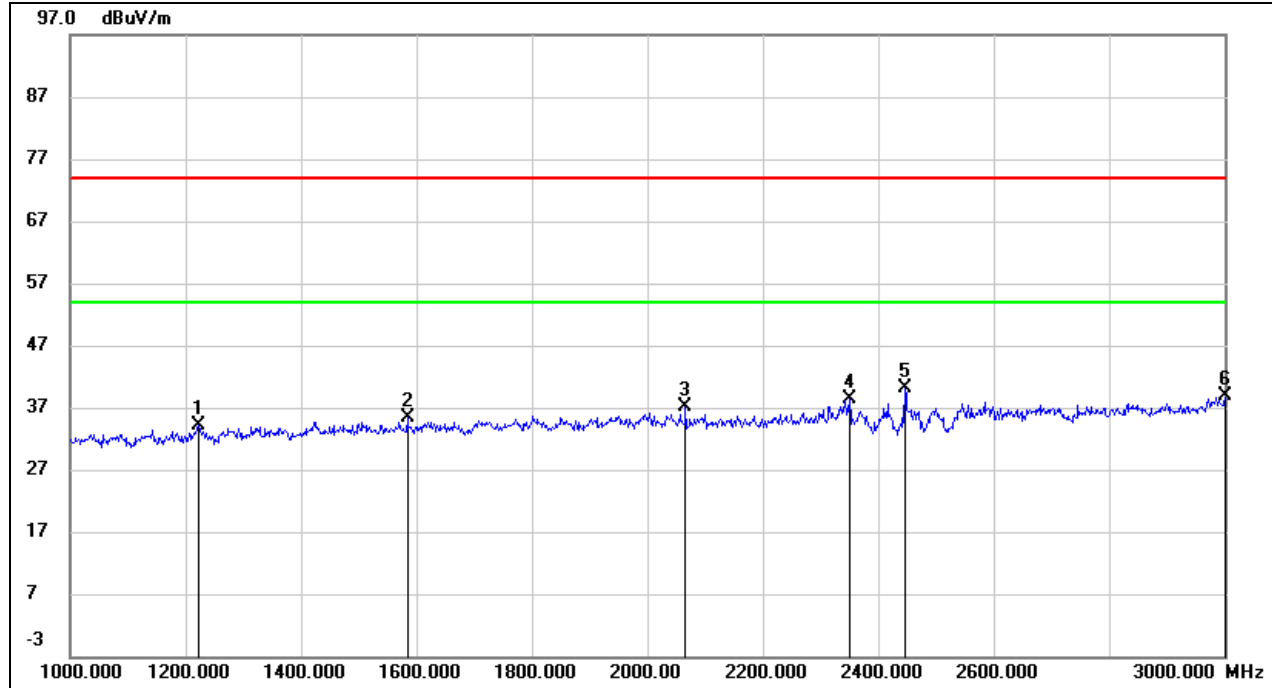


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1222.000	47.08	-12.91	34.17	74.00	-39.83	peak
2	1584.000	46.68	-11.35	35.33	74.00	-38.67	peak
3	2066.000	46.80	-9.71	37.09	74.00	-36.91	peak
4	2350.000	47.18	-8.78	38.40	74.00	-35.60	peak
5	2446.000	48.40	-8.25	40.15	74.00	-33.85	peak
6	3000.000	44.95	-6.04	38.91	74.00	-35.09	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit - Result
3. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2446
Polarity:	Vertical	Test Voltage:	DC 3.0V

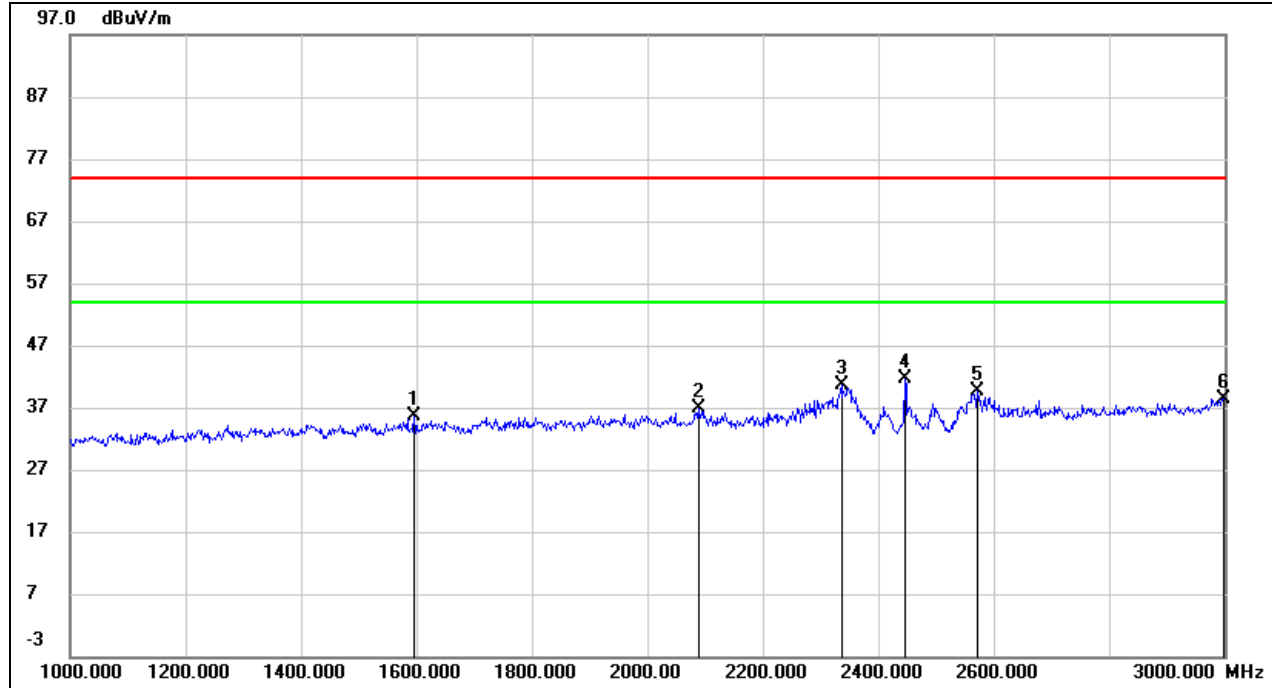


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1596.000	46.98	-11.31	35.67	74.00	-38.33	peak
2	2088.000	46.49	-9.72	36.77	74.00	-37.23	peak
3	2336.000	49.51	-8.85	40.66	74.00	-33.34	peak
4	2446.000	49.89	-8.25	41.64	74.00	-32.36	peak
5	2572.000	47.24	-7.65	39.59	74.00	-34.41	peak
6	2998.000	44.41	-6.04	38.37	74.00	-35.63	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit - Result
3. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2475
Polarity:	Horizontal	Test Voltage:	DC 3.0V

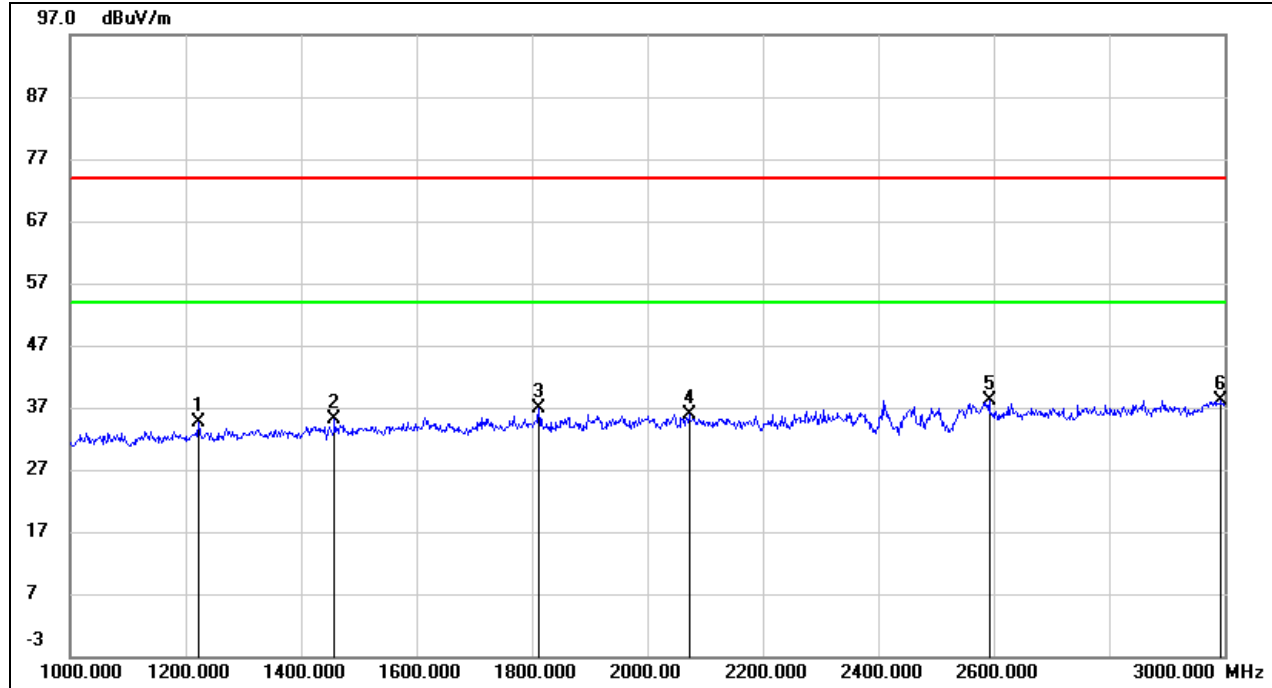


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1222.000	47.48	-12.91	34.57	74.00	-39.43	peak
2	1458.000	46.91	-11.83	35.08	74.00	-38.92	peak
3	1812.000	47.43	-10.55	36.88	74.00	-37.12	peak
4	2072.000	45.66	-9.71	35.95	74.00	-38.05	peak
5	2592.000	45.71	-7.56	38.15	74.00	-35.85	peak
6	2994.000	44.21	-6.06	38.15	74.00	-35.85	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit - Result
3. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2475
Polarity:	Vertical	Test Voltage:	DC 3.0V

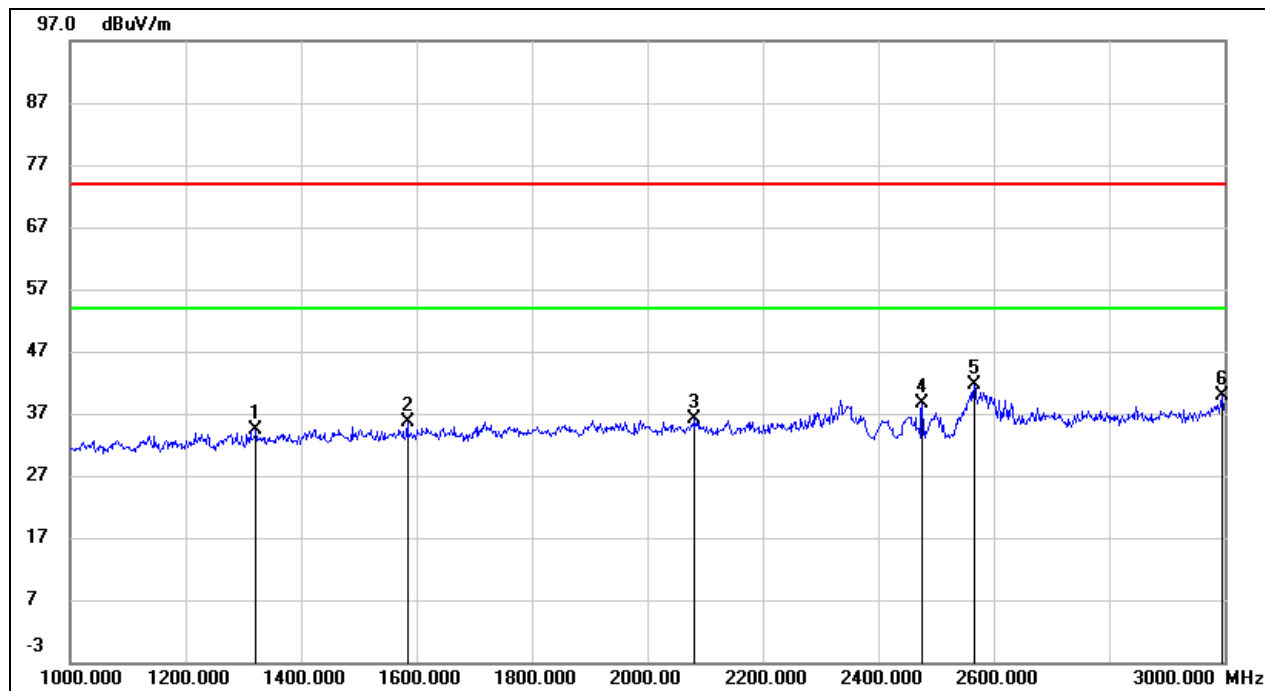

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1322.000	46.92	-12.45	34.47	74.00	-39.53	peak
2	1584.000	47.10	-11.35	35.75	74.00	-38.25	peak
3	2082.000	45.87	-9.71	36.16	74.00	-37.84	peak
4	2476.000	46.61	-8.10	38.51	74.00	-35.49	peak
5	2566.000	49.32	-7.68	41.64	74.00	-32.36	peak
6	2996.000	45.87	-6.05	39.82	74.00	-34.18	peak

Remark:


1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

2. Margin = Limit - Result

3. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

8.4. SPURIOUS EMISSIONS (3 GHZ ~ 18 GHZ)

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Horizontal	Test Voltage:	DC 3.0V

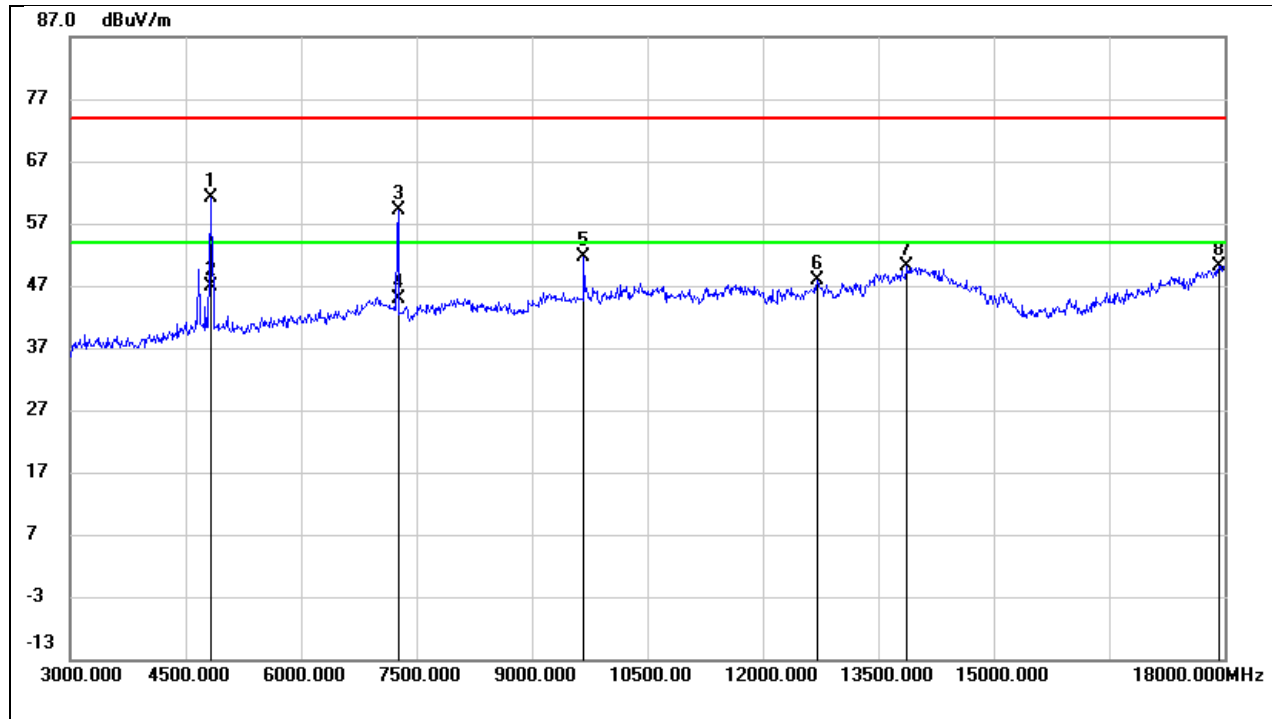


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	60.79	0.26	61.05	74.00	-12.95	peak
2	4830.000	/	/	46.77	54.00	-7.23	AVG
3	7260.000	52.45	6.70	59.15	74.00	-14.85	peak
4	7260.000	/	/	44.87	54.00	-9.13	AVG
5	9675.000	39.99	11.69	51.68	74.00	-22.32	peak
6	12705.000	28.49	19.36	47.85	74.00	-26.15	peak
7	13875.000	26.42	23.59	50.01	74.00	-23.99	peak
8	17925.000	22.71	27.50	50.21	74.00	-23.79	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit – Result
3. AVG Result=Peak Result + Duty Cycle Correction Factor
4. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Vertical	Test Voltage:	DC 3.0V

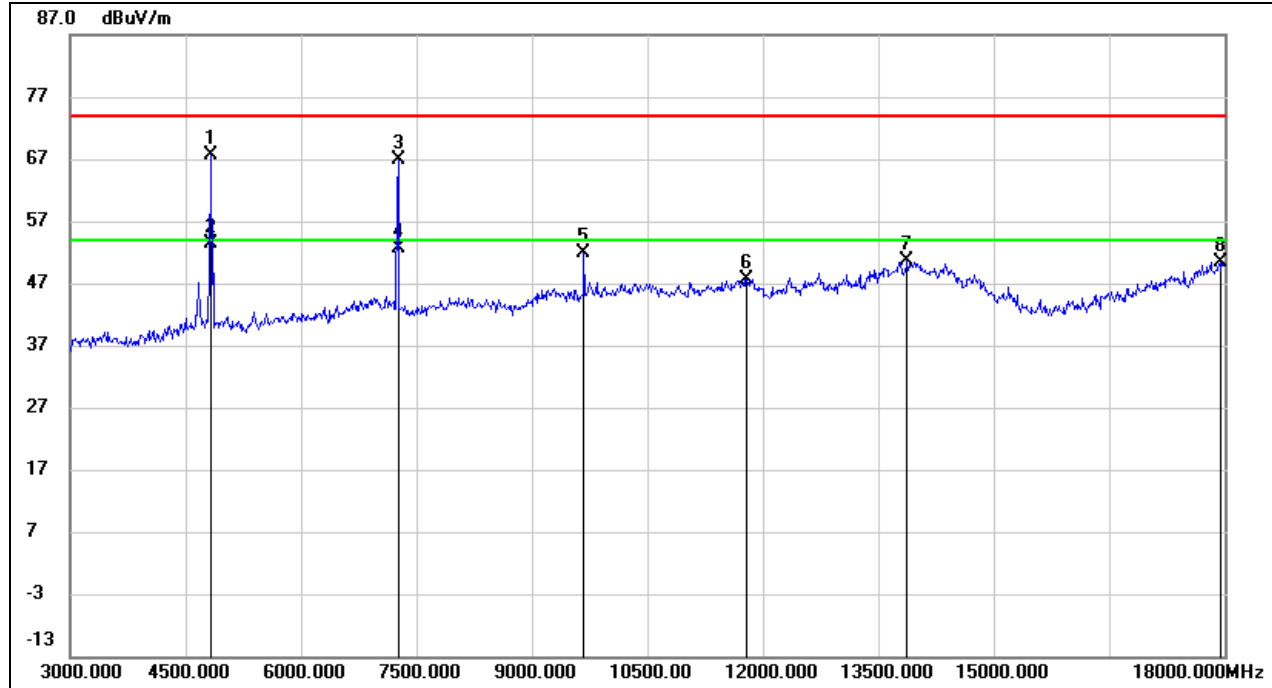


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	67.28	0.26	67.54	74.00	-6.46	peak
2	4830.000	/	/	53.26	54.00	-0.74	AVG
3	7260.000	60.25	6.70	66.95	74.00	-7.05	peak
4	7260.000	/	/	52.67	54.00	-1.33	AVG
5	9675.000	40.22	11.69	51.91	74.00	-22.09	peak
6	11790.000	30.00	17.71	47.71	74.00	-26.29	peak
7	13875.000	26.95	23.59	50.54	74.00	-23.46	peak
8	17940.000	22.89	27.61	50.50	74.00	-23.50	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit – Result
3. AVG Result=Peak Result + Duty Cycle Correction Factor
4. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2446
Polarity:	Horizontal	Test Voltage:	DC 3.0V

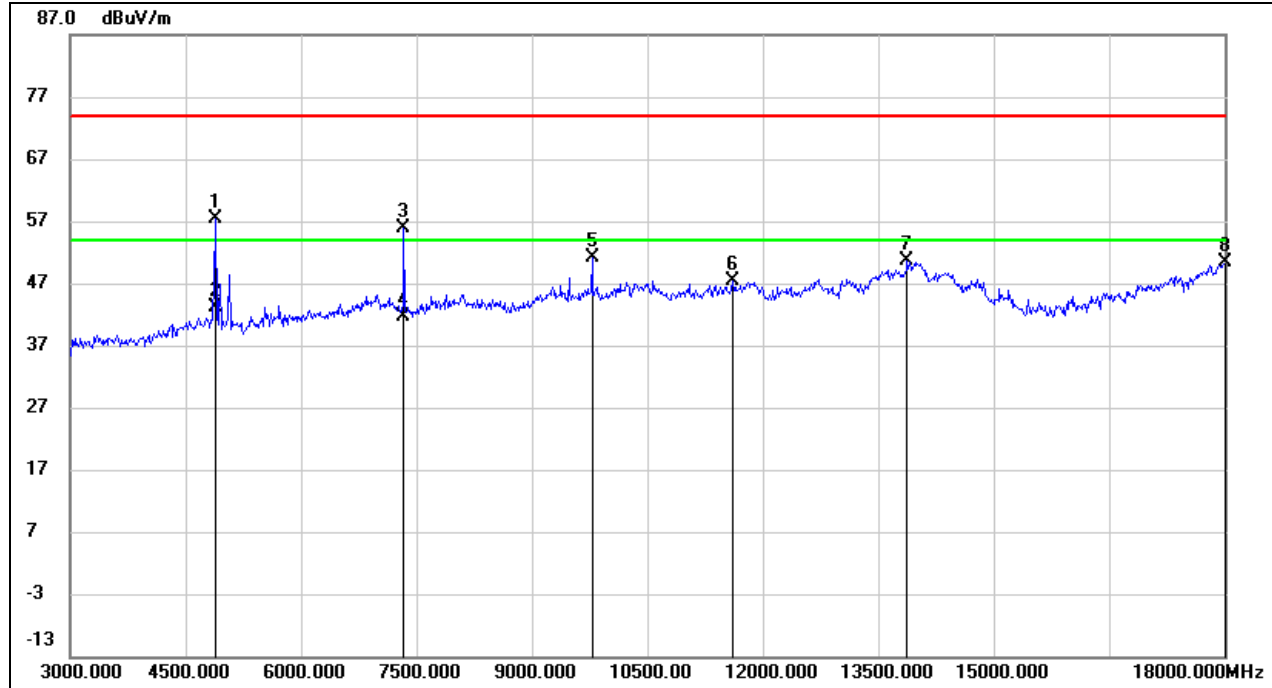


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	57.07	0.38	57.45	74.00	-16.55	peak
2	4890.000	/	/	43.17	54.00	-10.83	AVG
3	7335.000	49.23	6.62	55.85	74.00	-18.15	peak
4	7335.000	/	/	41.57	54.00	-12.43	AVG
5	9780.000	38.85	12.16	51.01	74.00	-22.99	peak
6	11610.000	30.29	17.18	47.47	74.00	-26.53	peak
7	13875.000	27.03	23.59	50.62	74.00	-23.38	peak
8	18000.000	22.50	27.98	50.48	74.00	-23.52	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit – Result
3. AVG Result=Peak Result + Duty Cycle Correction Factor
4. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2446
Polarity:	Vertical	Test Voltage:	DC 3.0V

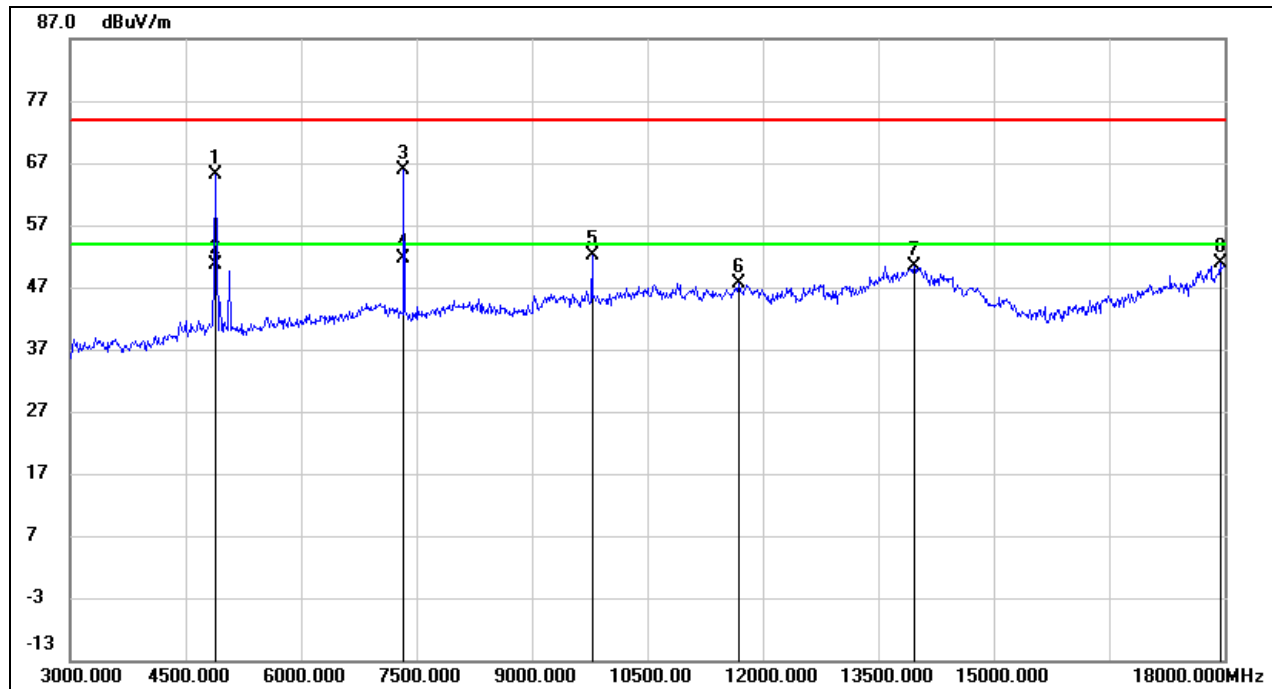


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	64.64	0.38	65.02	74.00	-8.98	peak
2	4890.000	/	/	50.74	54.00	-3.26	AVG
3	7335.000	59.28	6.62	65.90	74.00	-8.10	peak
4	7335.000	/	/	51.62	54.00	-2.38	AVG
5	9780.000	39.91	12.16	52.07	74.00	-21.93	peak
6	11685.000	30.22	17.41	47.63	74.00	-26.37	peak
7	13965.000	26.45	23.93	50.38	74.00	-23.62	peak
8	17940.000	23.22	27.61	50.83	74.00	-23.17	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit – Result
3. AVG Result=Peak Result + Duty Cycle Correction Factor
4. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2475
Polarity:	Horizontal	Test Voltage:	DC 3.0V

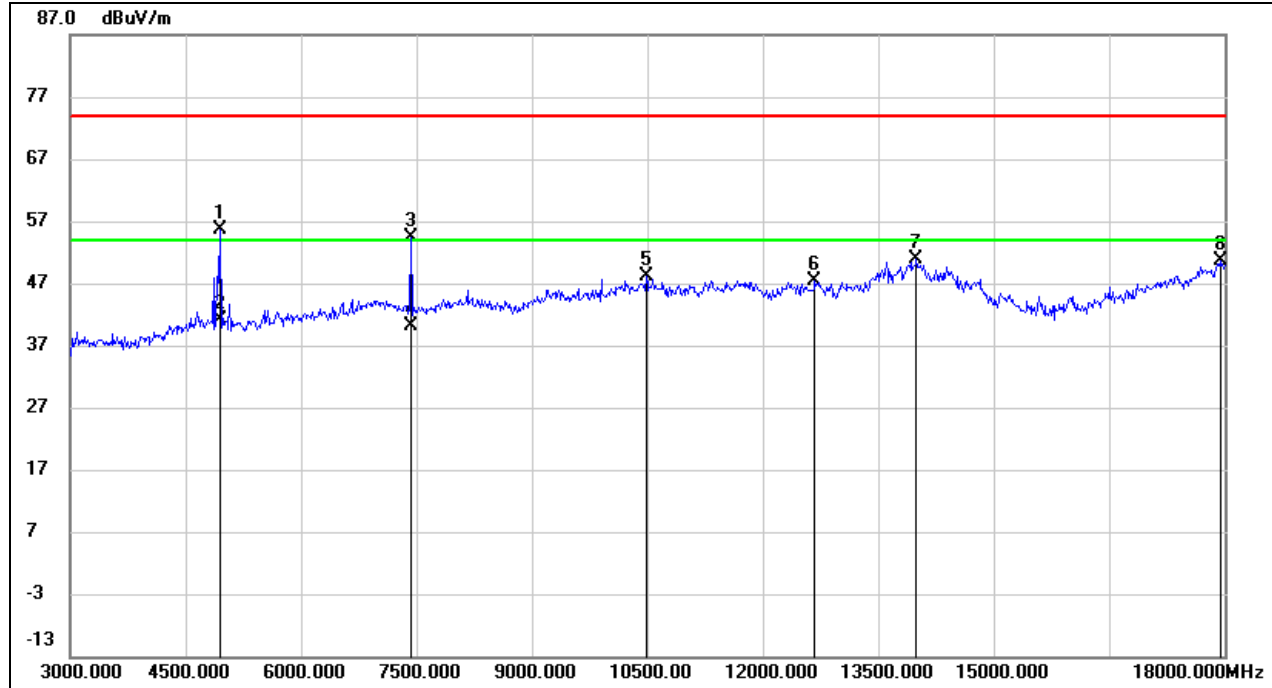


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	55.01	0.51	55.52	74.00	-18.48	peak
2	4950.000	/	/	41.24	54.00	-12.76	AVG
3	7425.000	47.68	6.61	54.29	74.00	-19.71	peak
4	7425.000	/	/	40.01	54.00	-13.99	AVG
5	10485.000	34.12	13.99	48.11	74.00	-25.89	peak
6	12675.000	28.03	19.33	47.36	74.00	-26.64	peak
7	13995.000	26.80	24.04	50.84	74.00	-23.16	peak
8	17940.000	23.06	27.61	50.67	74.00	-23.33	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit – Result
3. AVG Result=Peak Result + Duty Cycle Correction Factor
4. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2475
Polarity:	Vertical	Test Voltage:	DC 3.0V

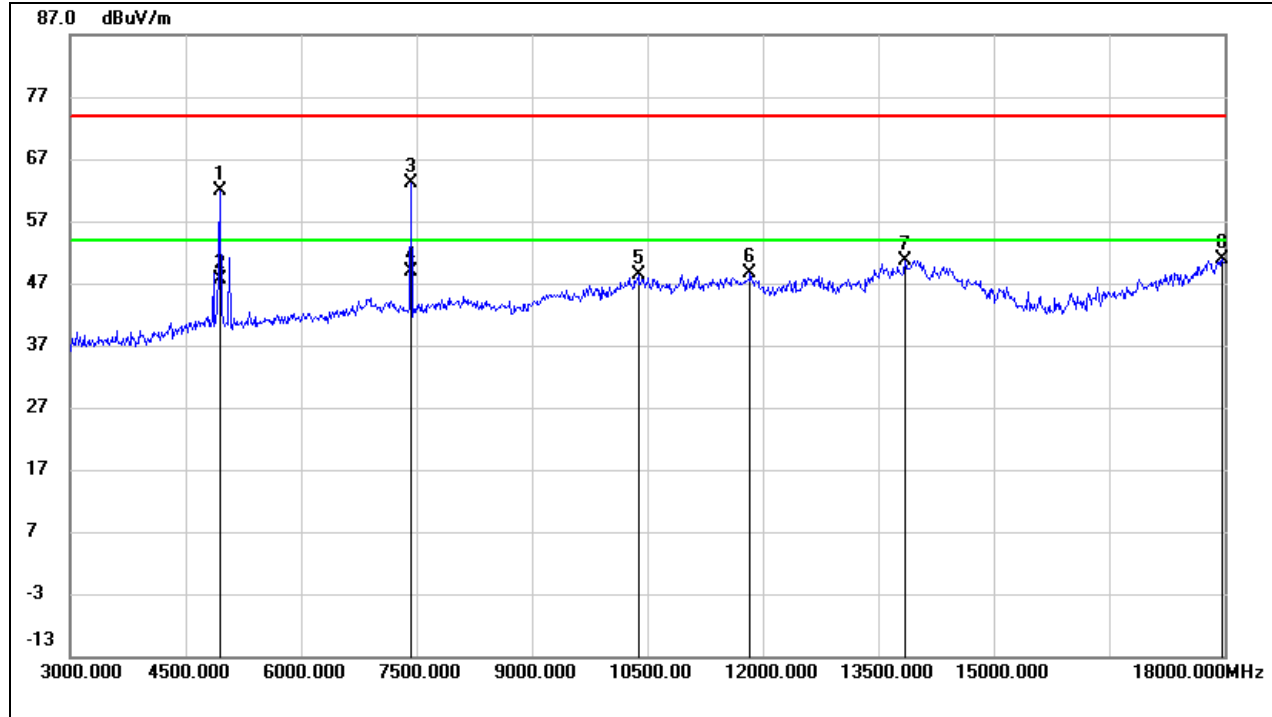


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	61.40	0.51	61.91	74.00	-12.09	peak
2	4950.000	/	/	47.63	54.00	-6.37	AVG
3	7425.000	56.53	6.61	63.14	74.00	-10.86	peak
4	7425.000	/	/	48.86	54.00	-5.14	AVG
5	10380.000	34.76	13.70	48.46	74.00	-25.54	peak
6	11835.000	30.75	17.84	48.59	74.00	-25.41	peak
7	13845.000	27.16	23.46	50.62	74.00	-23.38	peak
8	17970.000	23.03	27.79	50.82	74.00	-23.18	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit – Result
3. AVG Result=Peak Result + Duty Cycle Correction Factor
4. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

8.5. SPURIOUS EMISSIONS (9 KHZ ~ 30 MHZ)

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	DC 3.0V

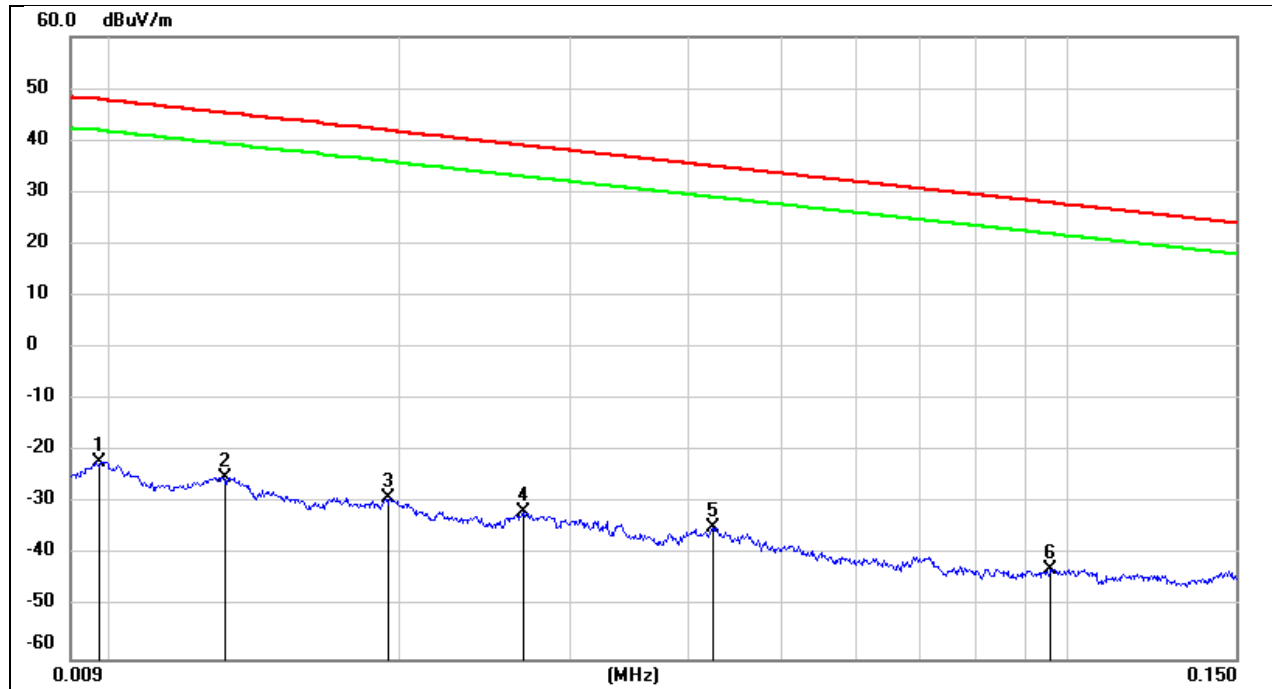


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0097	79.43	-101.38	-21.95	47.82	-69.77	peak
2	0.0131	76.47	-101.38	-24.91	45.25	-70.16	peak
3	0.0194	72.29	-101.35	-29.06	41.84	-70.90	peak
4	0.0268	69.69	-101.37	-31.68	39.04	-70.72	peak
5	0.0424	66.85	-101.44	-34.59	35.05	-69.64	peak
6	0.0956	59.13	-101.76	-42.63	27.99	-70.62	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Result - Limit

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	DC 3.0V

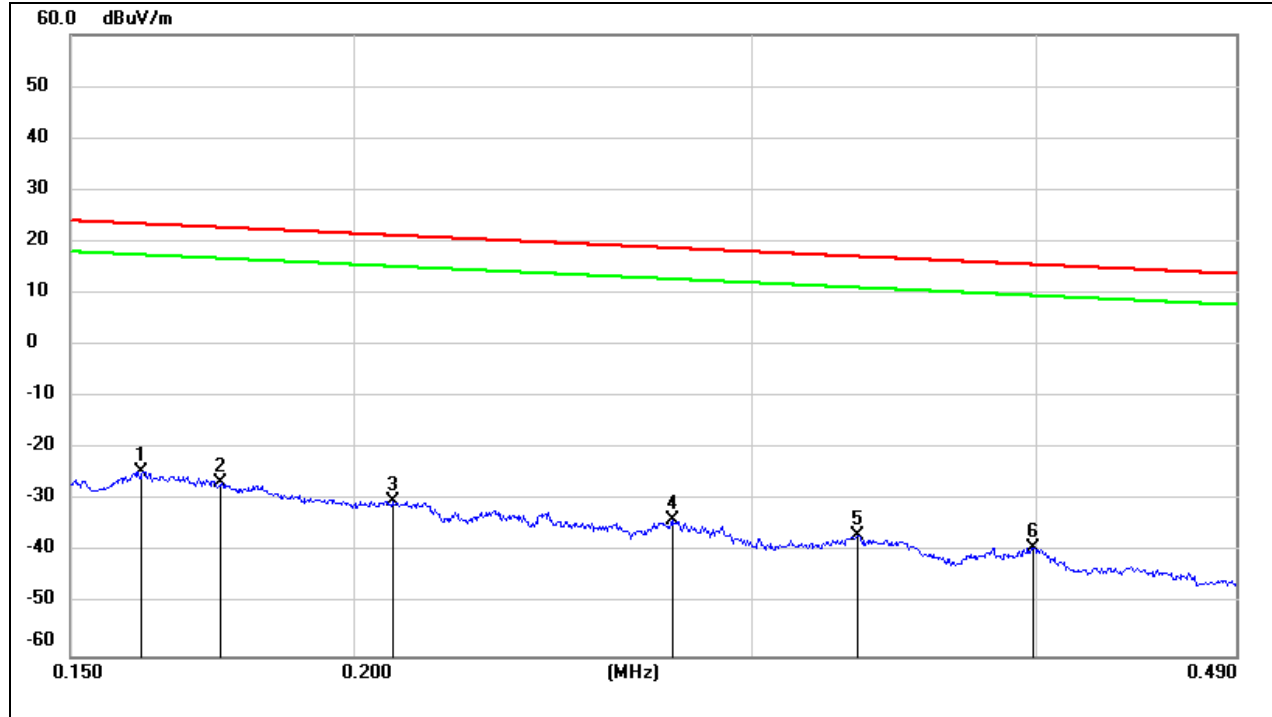


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1612	77.28	-101.65	-24.37	23.46	-47.83	peak
2	0.1748	75.20	-101.68	-26.48	22.76	-49.24	peak
3	0.2081	71.62	-101.73	-30.11	21.23	-51.34	peak
4	0.2765	68.22	-101.83	-33.61	18.77	-52.38	peak
5	0.3336	65.02	-101.89	-36.87	17.14	-54.01	peak
6	0.3986	62.75	-101.96	-39.21	15.59	-54.80	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

2. Margin = Result - Limit

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	DC 3.0V

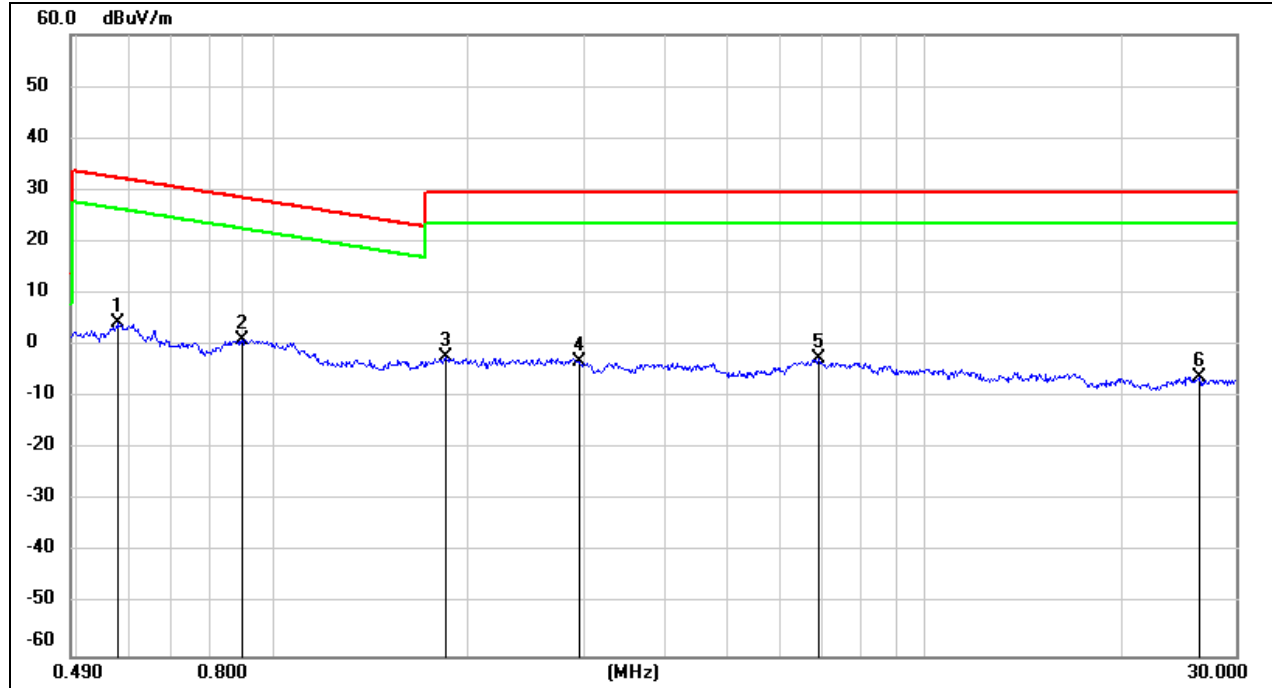


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5800	66.33	-62.08	4.25	32.33	-28.08	peak
2	0.8971	63.22	-62.20	1.02	28.55	-27.53	peak
3	1.8467	59.54	-61.89	-2.35	29.54	-31.89	peak
4	2.9687	58.37	-61.59	-3.22	29.54	-32.76	peak
5	6.8936	58.59	-61.22	-2.63	29.54	-32.17	peak
6	26.4293	54.19	-60.31	-6.12	29.54	-35.66	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Result - Limit

8.6. SPURIOUS EMISSIONS (18 GHZ ~ 26 GHZ)

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Horizontal	Test Voltage:	DC 3.0V

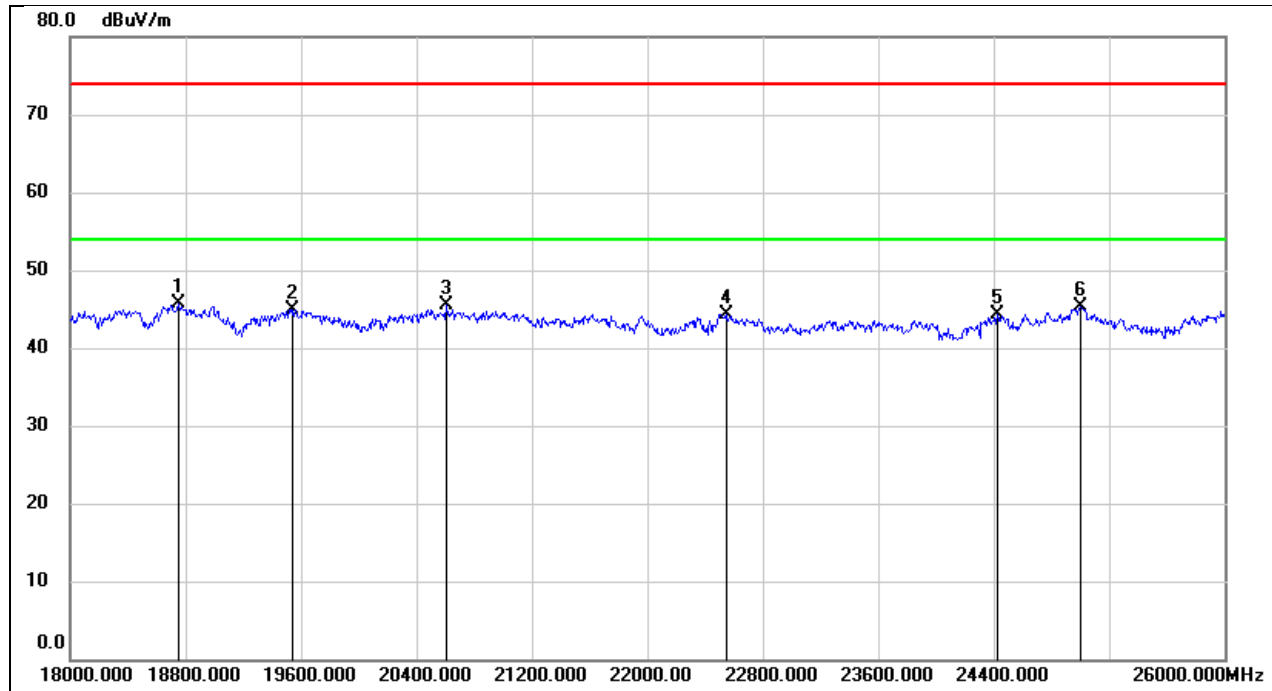


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18752.000	51.20	-5.42	45.78	74.00	-28.22	peak
2	19544.000	50.38	-5.50	44.88	74.00	-29.12	peak
3	20608.000	50.76	-5.25	45.51	74.00	-28.49	peak
4	22544.000	48.22	-3.84	44.38	74.00	-29.62	peak
5	24424.000	46.69	-2.48	44.21	74.00	-29.79	peak
6	25000.000	47.36	-2.10	45.26	74.00	-28.74	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit - Result
3. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Vertical	Test Voltage:	DC 3.0V

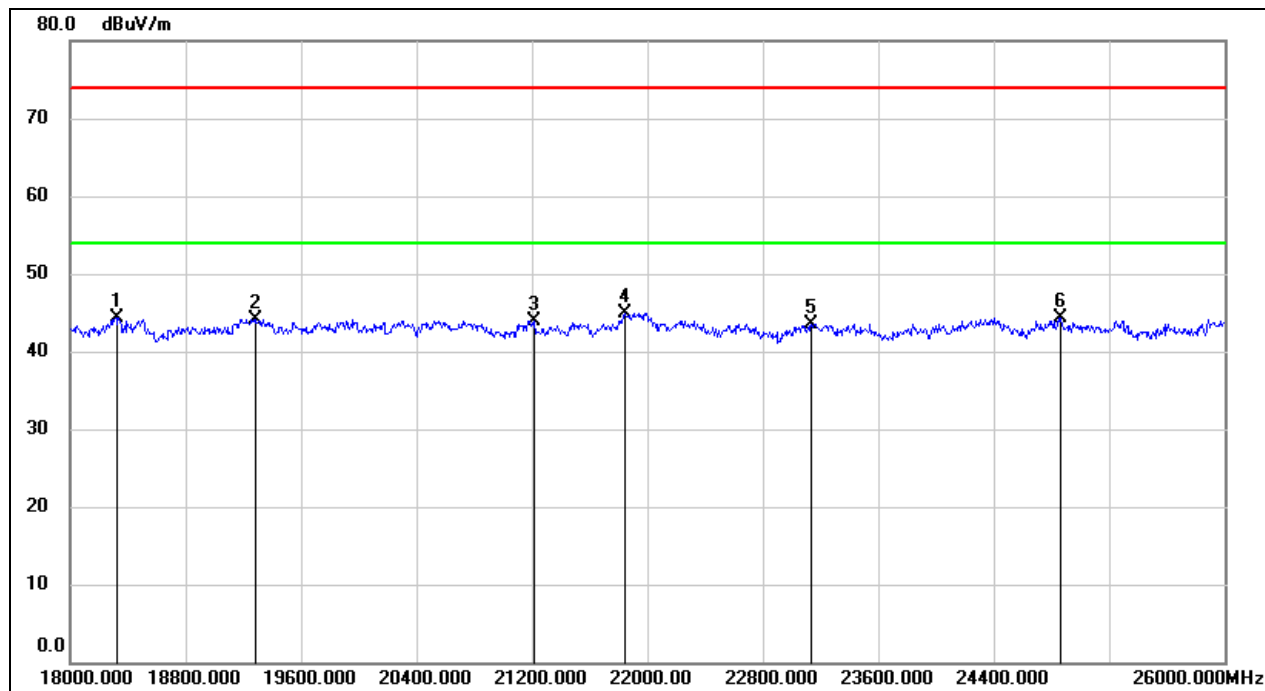


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18320.000	49.72	-5.46	44.26	74.00	-29.74	peak
2	19288.000	49.76	-5.58	44.18	74.00	-29.82	peak
3	21216.000	48.78	-4.79	43.99	74.00	-30.01	peak
4	21840.000	49.35	-4.38	44.97	74.00	-29.03	peak
5	23136.000	46.94	-3.40	43.54	74.00	-30.46	peak
6	24864.000	46.53	-2.23	44.30	74.00	-29.70	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit - Result
3. If the peak values are less than the AVG limit, the peak result is deemed to comply with AVG limit.

8.7. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Horizontal	Test Voltage:	DC 3.0V

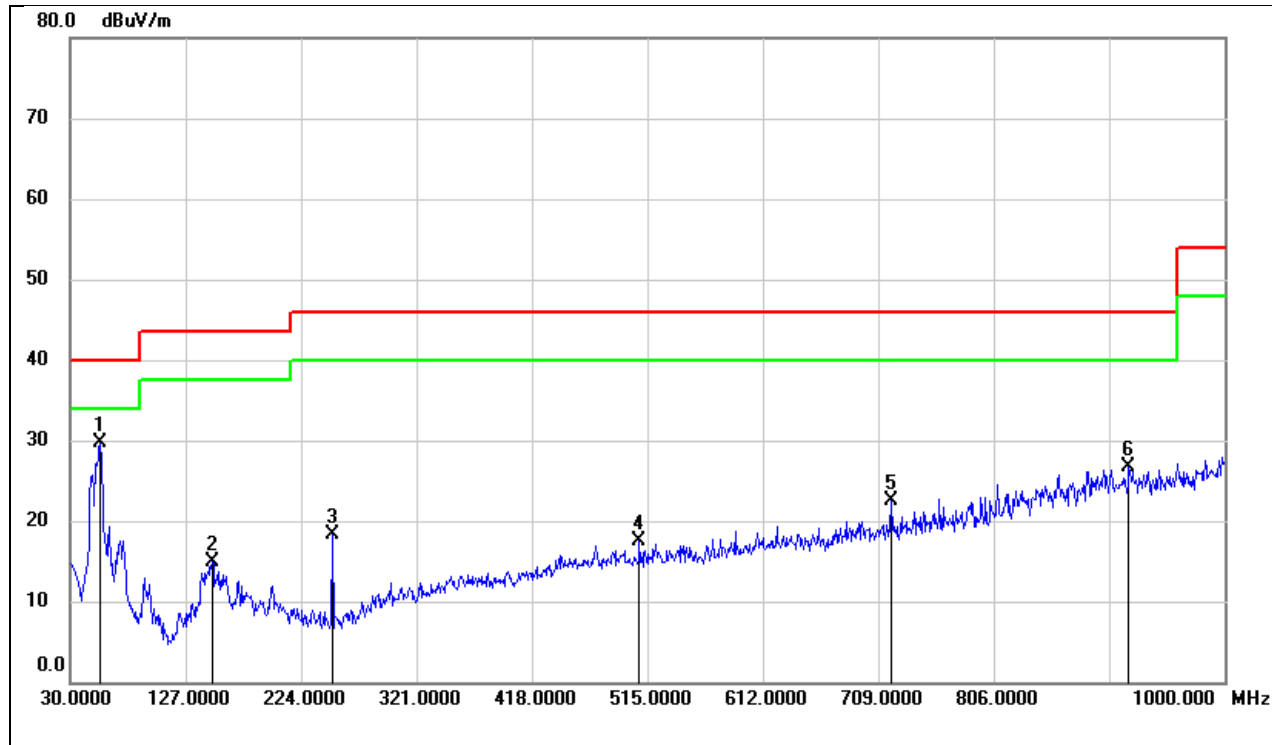


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	55.2200	44.87	-15.19	29.68	40.00	-10.32	peak
2	149.3100	28.55	-13.59	14.96	43.50	-28.54	peak
3	250.1900	32.83	-14.60	18.23	46.00	-27.77	peak
4	508.2100	24.60	-7.17	17.43	46.00	-28.57	peak
5	719.6700	26.45	-3.86	22.59	46.00	-23.41	peak
6	919.4900	27.27	-0.50	26.77	46.00	-19.23	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)
2. Margin = Limit - Result
3. If the peak values are less than the QP limit, the peak result is deemed to comply with QP limit.

Test Mode:	2.4GHz	Frequency(MHz):	2419
Polarity:	Vertical	Test Voltage:	DC 3.0V

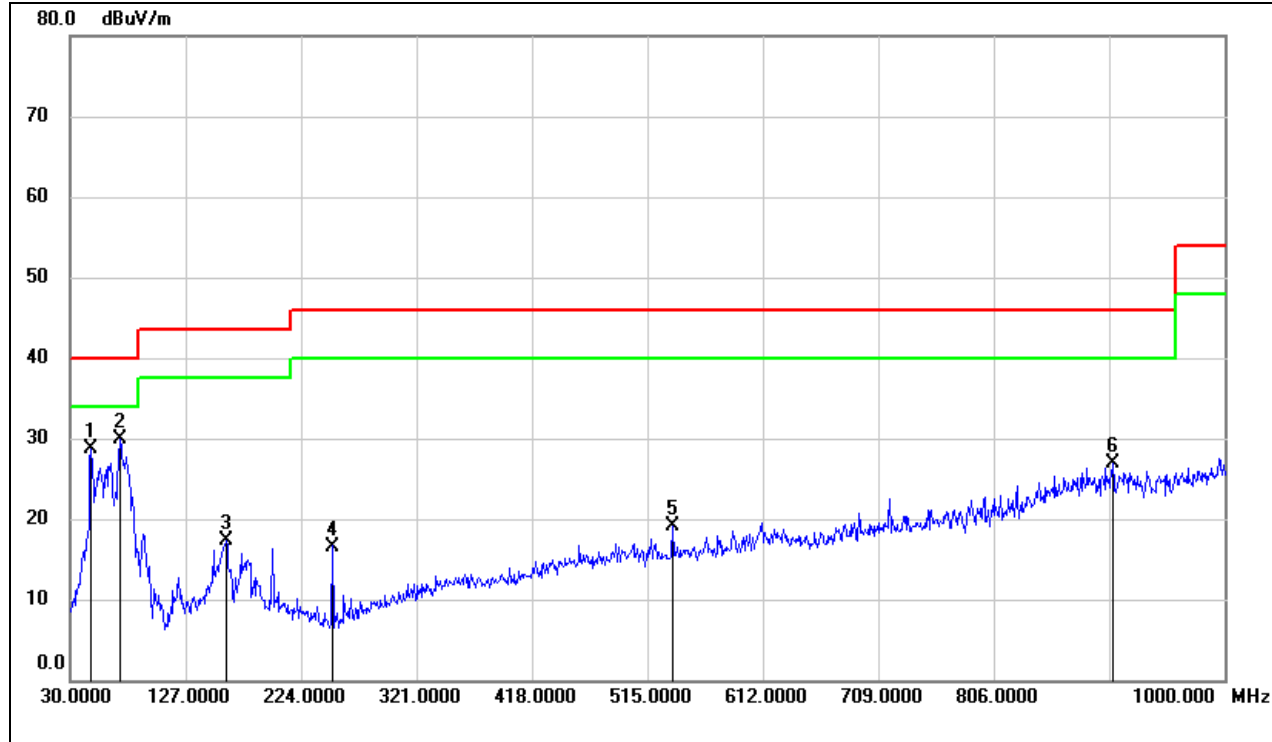

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	47.4600	43.90	-15.16	28.74	40.00	-11.26	peak
2	71.7100	45.32	-15.51	29.81	40.00	-10.19	peak
3	160.9500	30.07	-12.81	17.26	43.50	-26.24	peak
4	250.1900	31.20	-14.60	16.60	46.00	-29.40	peak
5	536.3400	25.84	-6.82	19.02	46.00	-26.98	peak
6	905.9100	27.50	-0.53	26.97	46.00	-19.03	peak

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

2. Margin = Limit - Result

3. If the peak values are less than the QP limit, the peak result is deemed to comply with QP limit.

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

END OF REPORT