

Prüfbericht-Nr.: Test report no.:	CN25IM32 001	Auftrags-Nr.: Order no.:	326097880	Seite 1 von 41 Page 1 of 41
Kunden-Referenz-Nr.: Client reference no.:	1288983	Auftragsdatum: Order date:	2025-03-03	
Auftraggeber: Client:	IKEA of Sweden AB Box 702, SE-343 81 Älmhult, Sweden			
Prüfgegenstand: Test item:	Portable Luminaire			
Bezeichnung / Typ-Nr.: Identification / Type no.:	E2499			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	FCC CFR47 Part 15, Subpart C Section 15.247 RSS-Gen Issue 5, Amendment 2, February 2021 RSS-247 Issue 4, July 24, 2025			
Wareneingangsdatum: Date of sample receipt:	2025-03-07 2025-04-07	Refer to photo document.		
Prüfmuster-Nr.: Test sample no:	A003940424-006 A003963730-001			
Prüfzeitraum: Testing period:	2025-04-10 ~ 2025-06-05			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	☒ <u>Hongfei Wu</u>		genehmigt von: authorized by:	☒ <u>Elliot Zhang</u>
Datum: Date:	2025-12-24 Signed by: Hongfei Wu		Datum: Date:	2025-12-24 Signed by: Elliot Zhang
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: FHO-E2499 IC: 10912A-E2499 HVIN: E2499 PMN: VARMBLIXT This report is for Zigbee.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: * Legend:	P(ass) = entspricht o.g. Prüfgrundlage(n) P(ass) = passed a.m. test specification(s) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) F(ail) = failed a.m. test specification(s) N/A = nicht anwendbar N/A = not applicable N/T = nicht getestet N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN25IM32 001
Test report no.:

Seite 2 von 41
Page 2 of 41

Anmerkungen Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 6dB & 99% BANDWIDTH

RESULT: Pass

5.1.3 OUTPUT POWER

RESULT: Pass

5.1.4 POWER SPECTRAL DENSITY

RESULT: Pass

5.1.5 CONDUCTED BAND EDGE AND OUT-OF BAND EMISSIONS

RESULT: Pass

5.2.1 CONDUCTED EMISSION

RESULT: Pass

5.3.1 RADIATED BAND-EDGE

RESULT: Pass

5.3.2 RADIATED SPURIOUS EMISSION

RESULT: Pass

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2.	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.3	TRACEABILITY	7
2.4	CALIBRATION	8
2.5	MEASUREMENT UNCERTAINTY	8
3.	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	RATINGS AND SYSTEM DETAILS.....	9
3.3	INDEPENDENT OPERATION MODES.....	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
4.	TEST SET-UP AND OPERATION MODES.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
5.	TEST RESULTS	12
5.1	CONDUCTED TESTING AT ANTENNA PORT	12
5.1.1	<i>Antenna Requirement.....</i>	<i>12</i>
5.1.2	<i>6dB & 99% Bandwidth.....</i>	<i>14</i>
5.1.3	<i>Output Power</i>	<i>21</i>
5.1.4	<i>Power Spectral Density</i>	<i>22</i>
5.1.5	<i>Conducted Band Edge and out-of Band Emissions.....</i>	<i>26</i>
5.2	EMISSION IN THE FREQUENCY RANGE UP TO 30MHz.....	28
5.2.1	<i>Conducted Emission.....</i>	<i>28</i>
5.3	EMISSION IN THE FREQUENCY RANGE ABOVE 30MHz	31
5.3.1	<i>Radiated Band-Edge</i>	<i>31</i>
5.3.2	<i>Radiated Spurious Emission.....</i>	<i>34</i>
6.	LIST OF TABLES	41
7.	LIST OF FIGURES	41

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

2. Test Sites

2.1 Test Facilities

TÜV Rheinland (Shanghai) Co., Ltd.

Workshop 14, North Half of Workshop 10 and Workshop 16, Pingqian (Taicang) Modern Industrial Park, No.525, Yuewang Lingang South Road, Shaxi, Taicang, Jiangsu, China

The used test equipment is in accordance with CISPR 16 for measurement of radio interference.

The Federal Communications Commission has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance with the requirements of section 2.948 of the FCC rules. The description of the test facility is listed under FCC registration number 930979.

The Innovation, Science and Economic Development Canada has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance. The description of the test facility is listed under chambers filing number 33038.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Equip.	Description	Model	Manufacturer	Due Date DD.MM.YYYY
EMC-C-196	Wireless connectivity tester	CMW270	Rohde & Schwarz	23.08.2025
EMC-C-302	Signal generator	SMB100B (6 GHz)	Rohde & Schwarz	10.12.2025
EMC-C-303	Vector Signal generator	SMW200A	Rohde & Schwarz	10.12.2025
EMC-C-304	OSP	OSP-B157W8	Rohde & Schwarz	10.12.2025
EMC-C-161	Spectrum analyser	FSV40	Rohde&Schwarz	15.07.2025
EMC-C-018	Double ridged horn antenna	BBHA 9120 D	Schwarzbeck	24.03.2026
EMC-C-066	EMI test receiver	ESCI	Rohde&Schwarz	27.10.2025
EMC-C-068	Broadband horn antenna	BBHA 9170	Schwarzbeck	18.06.2028
EMC-C-155	BiLog antenna	CBL 6112D	Teseq	24.03.2026
EMC-C-175	Preamplifier	EMC051845SE	EMCI Taiwan	24.07.2025
EMC-C-176	Preamplifier	EMC184045SE	EMCI Taiwan	24.07.2025
EMC-C-001	3 m semi-anechoic chamber	SAC3	Frankonia	03.12.2026
EMC-C-141	Shielded enclosure	10.055x3.605x3.000	Frankonia	08.11.2028
EMC-C-195	EMI test receiver	ESR3	Rohde&Schwarz	03.08.2025
EMC-C-190	Artificial mains network	ENV432	Rohde&Schwarz	11.10.2025
software				
EMC-S-036	RF measurement software	WMS32-WB (11.40.00)	Rohde&Schwarz	NA
EMC-S-032	EMI measurement software	EMC32-E+ (10.60.20)	Rohde&Schwarz	NA
EMC-S-028	EMI measurement software	EMC32-MEB (10.60.20)	Rohde&Schwarz	NA

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	±0.39dB
	> 1GHz	±0.68dB
Conducted Emission	150kHz - 30MHz	±2.33dB
Radiated Emission	9kHz - 30MHz	±2.93dB
	30MHz - 1GHz	±5.34dB
	> 1GHz	±5.40dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is a LED lamp which supports Bluetooth Low Energy, Zigbee and Thread.

The aim of this report is to evaluate RF character of Zigbee of the EUT.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Description of EUT	
Product Name:	Portable Luminaire
Model No.:	E2499
Operation Voltage:	DC 24V (Powered by adapter, Model: ICPSW24-7-4, Input: AC 100-240V, Output: DC 24V)
Test Voltage:	DC 3.3V
RF Technical:	1) BLE 2) Zigbee 3) Thread
Technical Specification of Zigbee	
Frequency Range:	2405~2480MHz
Modulation Type:	OQPSK
Antenna Type:	PCB Antenna
Antenna Gain:	-0.54 dBi (declared by client)

Table 4: Operation Channel List

RF Channel	Frequency [MHz]	RF Channel	Frequency [MHz]	RF Channel	Frequency [MHz]	RF Channel	Frequency [MHz]
11	2405	15	2425	19	2445	23	2465
12	2410	16	2430	20	2450	24	2470
13	2415	17	2435	21	2455	25	2475
14	2420	18	2440	22	2460	26	2480

3.3 Independent Operation Modes

Test frequencies are lowest channel: 2405 MHz, middle channel: 2445 MHz and highest channel: 2480 MHz

The basic operation modes are:

- A. Zigbee transmitting mode
- B. Radio operating mode

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10:2020 and ANSI C63.10-2020+COR. 1-2023+C63.10A-2024+ERRATA TO C63.10A-2024.

Test Software: sscom 5.13.1

Table 5: Power parameter value

Mode	Power Parameter Setting Value
Zigbee	10

4.3 Special Accessories and Auxiliary Equipment

Table 6: Auxiliary Equipment

Equipment	Manufacturer	Model
Laptop	Lenovo	21AJ-S57N0J
Mobile phone	Apple	iPhone 15
Loudspeaker	Apple	HomePod mini
Remote control	IKEA	E2489

4.4 Countermeasures to achieve EMC Compliance

Null.

5. Test Results

5.1 Conducted Testing at Antenna Port

5.1.1 Antenna Requirement

RESULT:**Pass**

According to the manufacturer declared, the EUT has one internal PCB antenna, the directional gain of antenna is -0.54 dBi and the antenna is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Table 7: Antenna Requirement**FCC 15.203 – Antenna Requirement 1**

Requirement: No antenna other than that furnished by the responsible party shall be used with the device

Results: Antenna type: PCB Antenna

Verdict: Pass

FCC 15.204 – Antenna Requirement 2

Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.

Results: Only one PCB antenna can be used

Verdict: Pass

RSS-Gen 6.4 – External Control

Requirement: The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the regulatory requirements, including RSS-Gen and the applicable RSSs

Results: The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.

Verdict: PASS

RSS-Gen 6.8 – Antenna Requirement

Requirement: When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

Results:

a) Antenna Type:	PCB Antenna
b) Manufacture:	N/A
c) Model No.:	N/A
d) Gain with reference to an isotropic radiator:	-0.54 dBi

Verdict: PASS

5.1.2 6dB & 99% Bandwidth**RESULT:****Pass**

Date of testing	:	2025-05-23
Ambient temperature	:	22.4°C
Relative humidity	:	57.5%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.247(a)(2) RSS-247 Issue 4, July 24, 2025, Clause 6.3.1(a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 6.7
Test procedure	:	ANSI C63.10:2020 ANSI C63.10-2020+COR. 1-2023+C63.10A-2024+ERRATA TO C63.10A-2024
Test voltage	:	DC 3.3V
Test modes applied	:	A

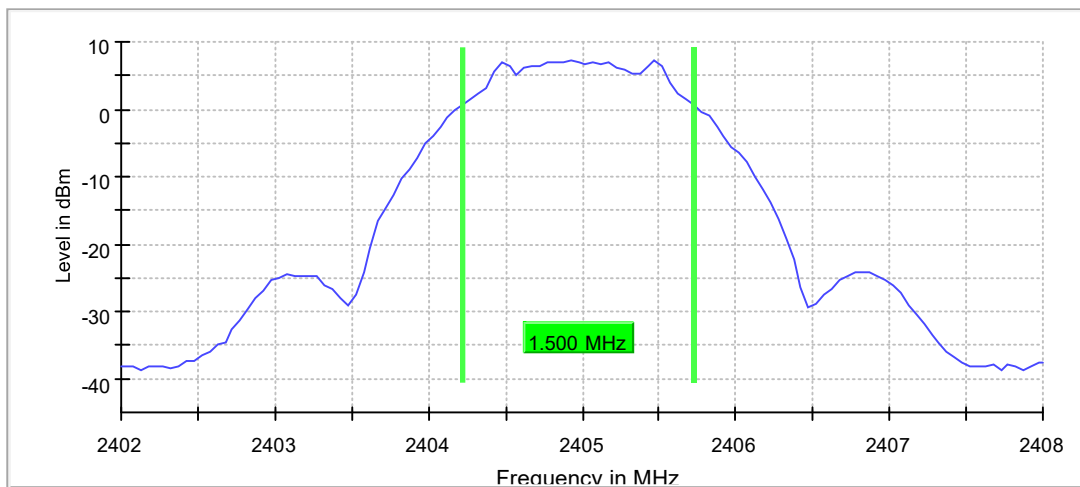
6dB Bandwidth, 2405MHz

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2405.000000	1.500000	0.500000	---	2404.225000	2405.725000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2405.000000	7.3	PASS

6 dB Bandwidth


Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40200 GHz	2.40200 GHz
Stop Frequency	2.40800 GHz	2.40800 GHz
Span	6.000 MHz	6.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	120	~ 120
Sweptime	18.984 µs	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	23 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

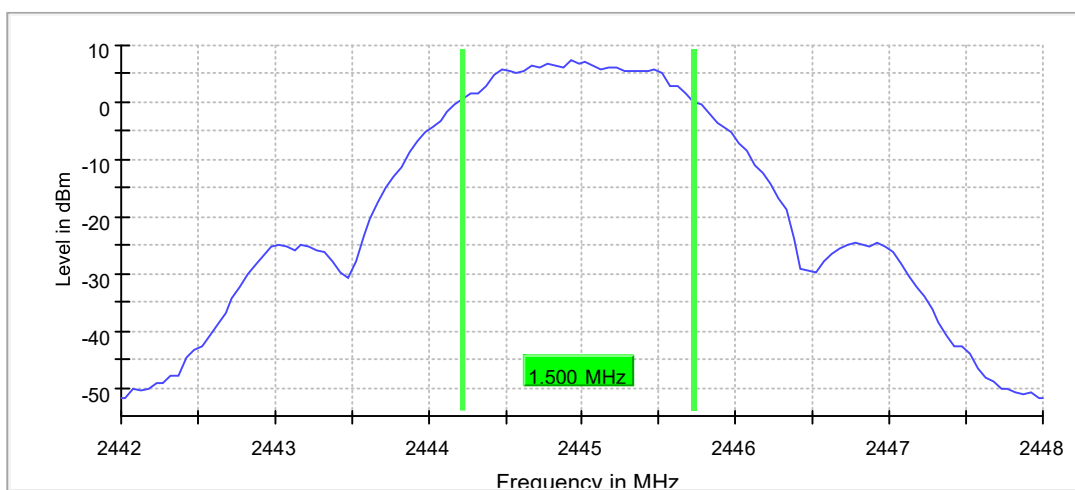
6dB Bandwidth, 2445MHz

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2445.000000	1.500000	0.500000	---	2444.225000	2445.725000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2445.000000	7.3	PASS

6 dB Bandwidth


Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.44800 GHz	2.44800 GHz
Span	6.000 MHz	6.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	120	~ 120
Sweeptime	18.984 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

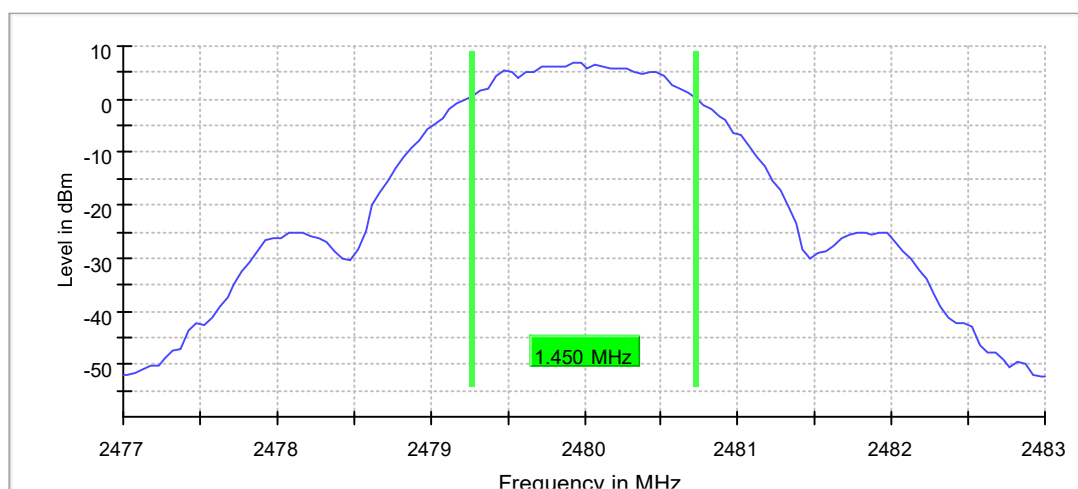
6dB Bandwidth, 2480MHz

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.450000	0.500000	---	2479.275000	2480.725000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	6.9	PASS

6 dB Bandwidth


Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47700 GHz	2.47700 GHz
Stop Frequency	2.48300 GHz	2.48300 GHz
Span	6.000 MHz	6.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	120	~ 120
Sweptime	18.984 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

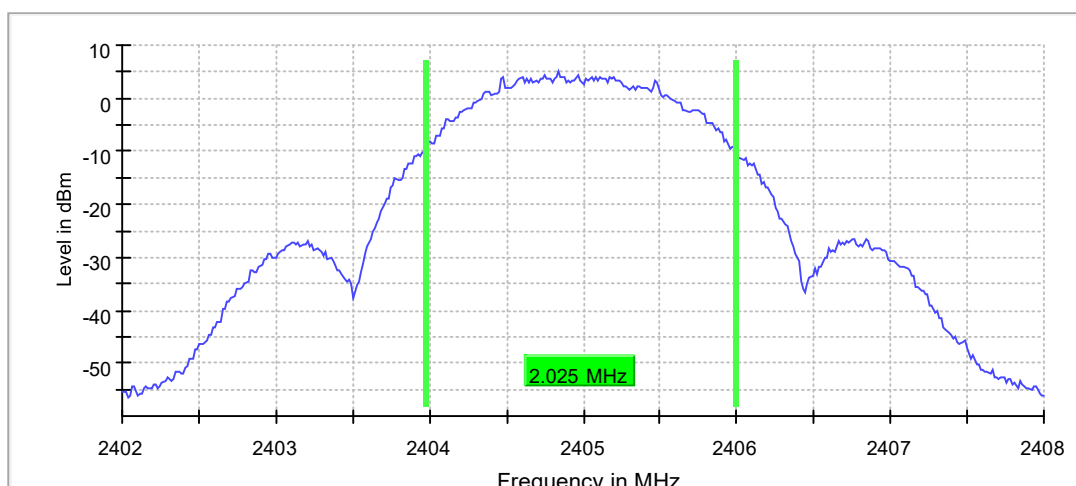
99% Occupied Channel Bandwidth, 2405MHz

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2405.000000	2.025000	---	---	2403.972500	2405.997500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2405.000000	PASS

99 % Bandwidth


Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40200 GHz	2.40200 GHz
Stop Frequency	2.40800 GHz	2.40800 GHz
Span	6.000 MHz	6.000 MHz
RBW	30.000 kHz	>= 30.000 kHz
VBW	100.000 kHz	>= 90.000 kHz
SweepPoints	400	~ 400
Sweeptime	63.216 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	32 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.27 dB	0.30 dB

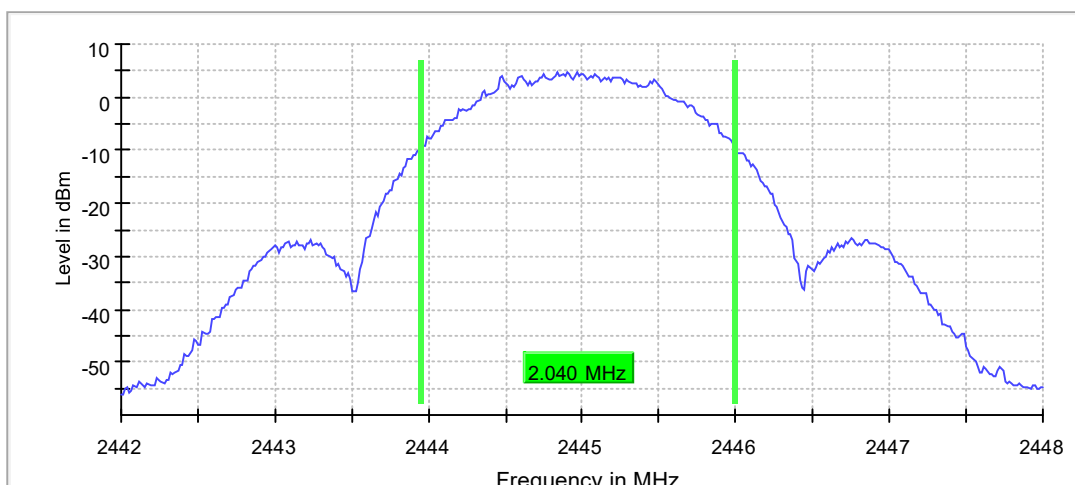
99% Occupied Channel Bandwidth, 2445MHz

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2445.000000	2.040000	---	---	2443.957500	2445.997500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2445.000000	PASS

99 % Bandwidth


Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.44800 GHz	2.44800 GHz
Span	6.000 MHz	6.000 MHz
RBW	30.000 kHz	>= 30.000 kHz
VBW	100.000 kHz	>= 90.000 kHz
SweepPoints	400	~ 400
Sweeptime	63.216 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	60 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.30 dB

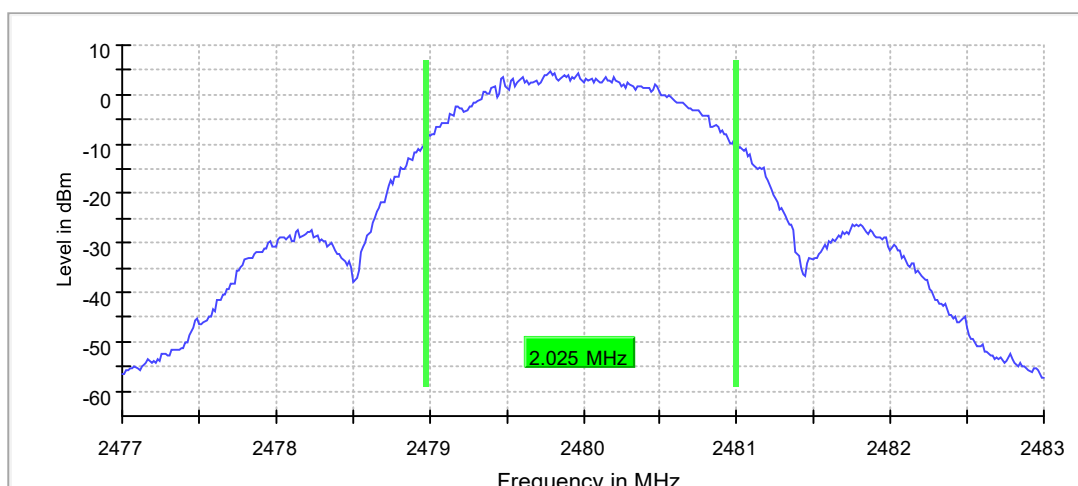
99% Occupied Channel Bandwidth, 2480MHz

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	2.025000	---	---	2478.972500	2480.997500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth


Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47700 GHz	2.47700 GHz
Stop Frequency	2.48300 GHz	2.48300 GHz
Span	6.000 MHz	6.000 MHz
RBW	30.000 kHz	>= 30.000 kHz
VBW	100.000 kHz	>= 90.000 kHz
SweepPoints	400	~ 400
Sweeptime	63.216 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	59 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.02 dB	0.30 dB

5.1.3 Output Power

RESULT:**Pass**

Date of testing : 2025-05-23
Ambient temperature : 22.4°C
Relative humidity : 57.5%
Atmospheric pressure : 101kPa
Test requirement : FCC Part 15.247(b)(3)
RSS-247 Issue 4, July 24, 2025, Clause 6.3.2
Test procedure : ANSI C63.10:2020
ANSI C63.10-2020+COR. 1-2023+C63.10A-
2024+ERRATA TO C63.10A-2024
Test voltage : DC 3.3V
Test modes applied : A

Table 8: Peak Output Power

Frequency [MHz]	Peak Conducted Output Power [dBm]	Limit [dBm]
2405	9.7	30
2445	9.7	30
2480	9.1	30

Note:

1. The cable loss is taken into account in results.
2. EIRP=Conducted Output Power + Antenna Gain (-0.54dBi), which is far below the 4 W (36dBm).

Prüfbericht - Nr.: CN25IM32 001
*Test Report No.***Seite 22 von 41**
Page 22 of 41

5.1.4 Power Spectral Density

RESULT:

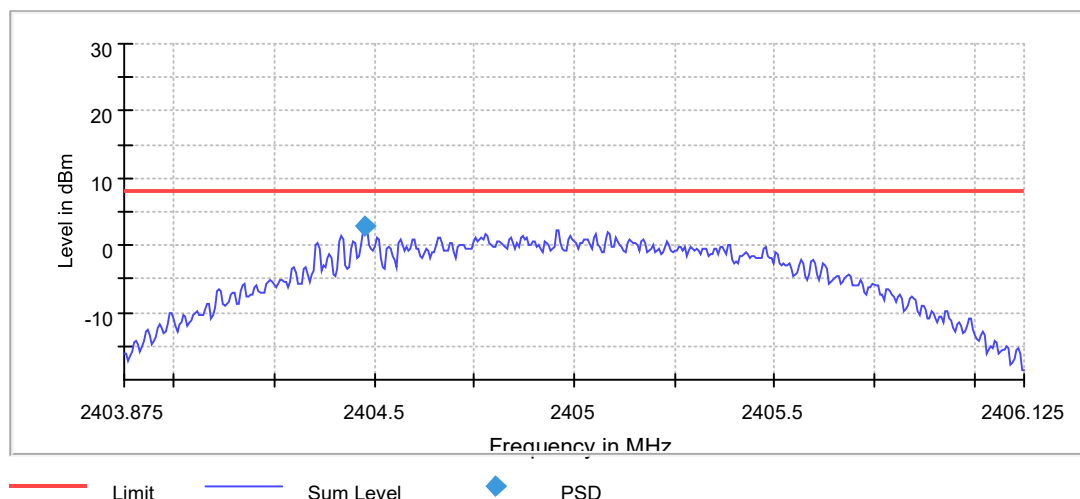
Pass

Date of testing	:	2025-05-23
Ambient temperature	:	22.4°C
Relative humidity	:	57.5%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.247(e) RSS-247 Issue 4, July 24, 2025, Clause 6.3.1(b)
Test procedure	:	ANSI C63.10:2020 ANSI C63.10-2020+COR. 1-2023+C63.10A- 2024+ERRATA TO C63.10A-2024
Test voltage	:	DC 3.3V
Test modes applied	:	A

Power Spectral Density, 2405MHz

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2405.000000	2404.477500	2.865	8.0	PASS

Peak Power Spectral Density

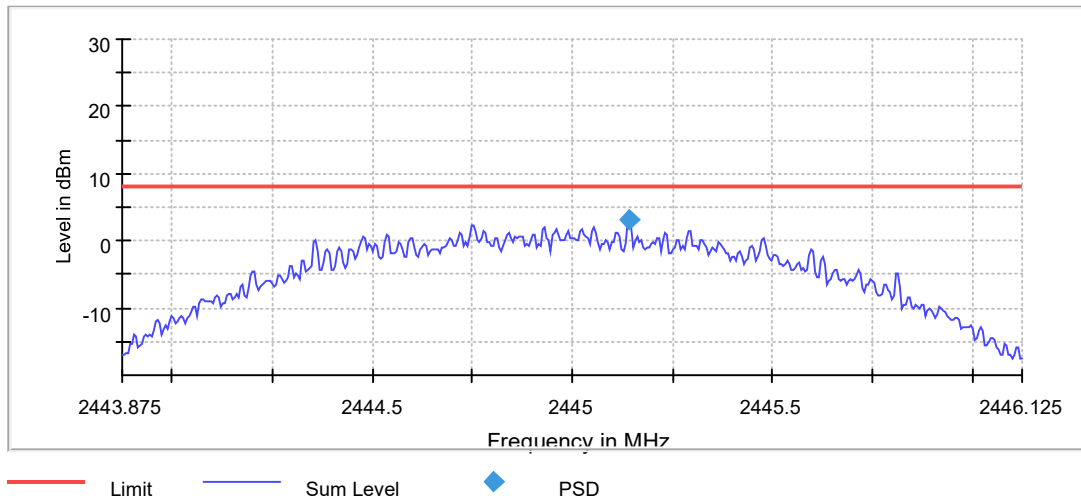

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40388 GHz	2.40388 GHz
Stop Frequency	2.40613 GHz	2.40613 GHz
Span	2.250 MHz	2.250 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	450	~ 450
Sweptime	2.250 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	53 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.37 dB	0.50 dB

Power Spectral Density, 2445MHz

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2445.000000	2445.142500	3.103	8.0	PASS

Peak Power Spectral Density

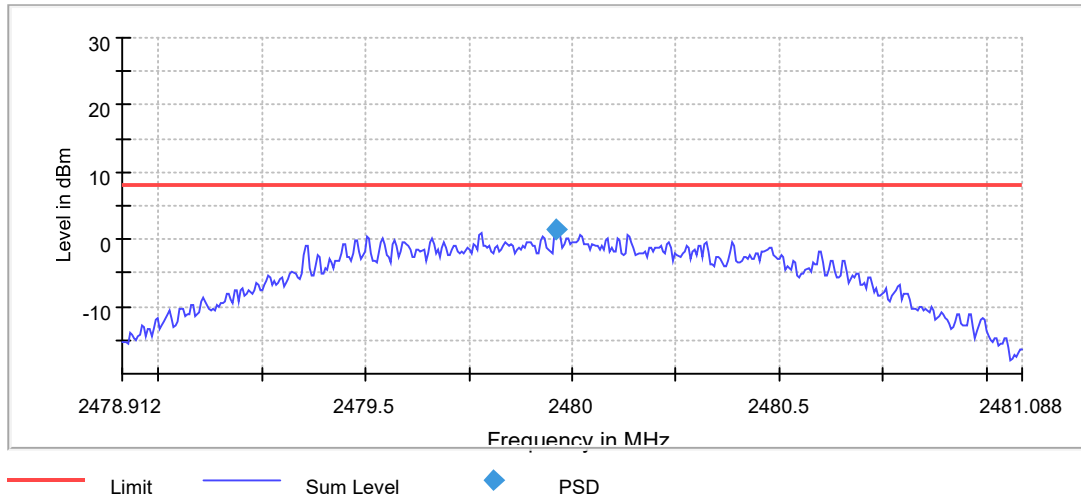

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44388 GHz	2.44388 GHz
Stop Frequency	2.44613 GHz	2.44613 GHz
Span	2.250 MHz	2.250 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	450	~ 450
Sweeptime	2.250 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	35 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.20 dB	0.50 dB

Power Spectral Density, 2480MHz

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2480.000000	2479.960000	1.532	8.0	PASS

Peak Power Spectral Density


Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47891 GHz	2.47891 GHz
Stop Frequency	2.48109 GHz	2.48109 GHz
Span	2.175 MHz	2.175 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	435	~ 435
Sweptime	2.180 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.25 dB	0.50 dB

5.1.5 Conducted Band Edge and out-of Band Emissions

RESULT:

Pass

Date of testing : 2025-05-08
Ambient temperature : 22.5°C
Relative humidity : 57.5%
Atmospheric pressure : 101kPa
Test requirement : FCC Part 15.247(d)
RSS-247 Issue 4, July 24, 2025, Clause 6.6
Test procedure : ANSI C63.10:2020
ANSI C63.10-2020+COR. 1-2023+C63.10A-
2024+ERRATA TO C63.10A-2024
Test voltage : DC 3.3V
Test modes applied : A

Figure 1: Reference level

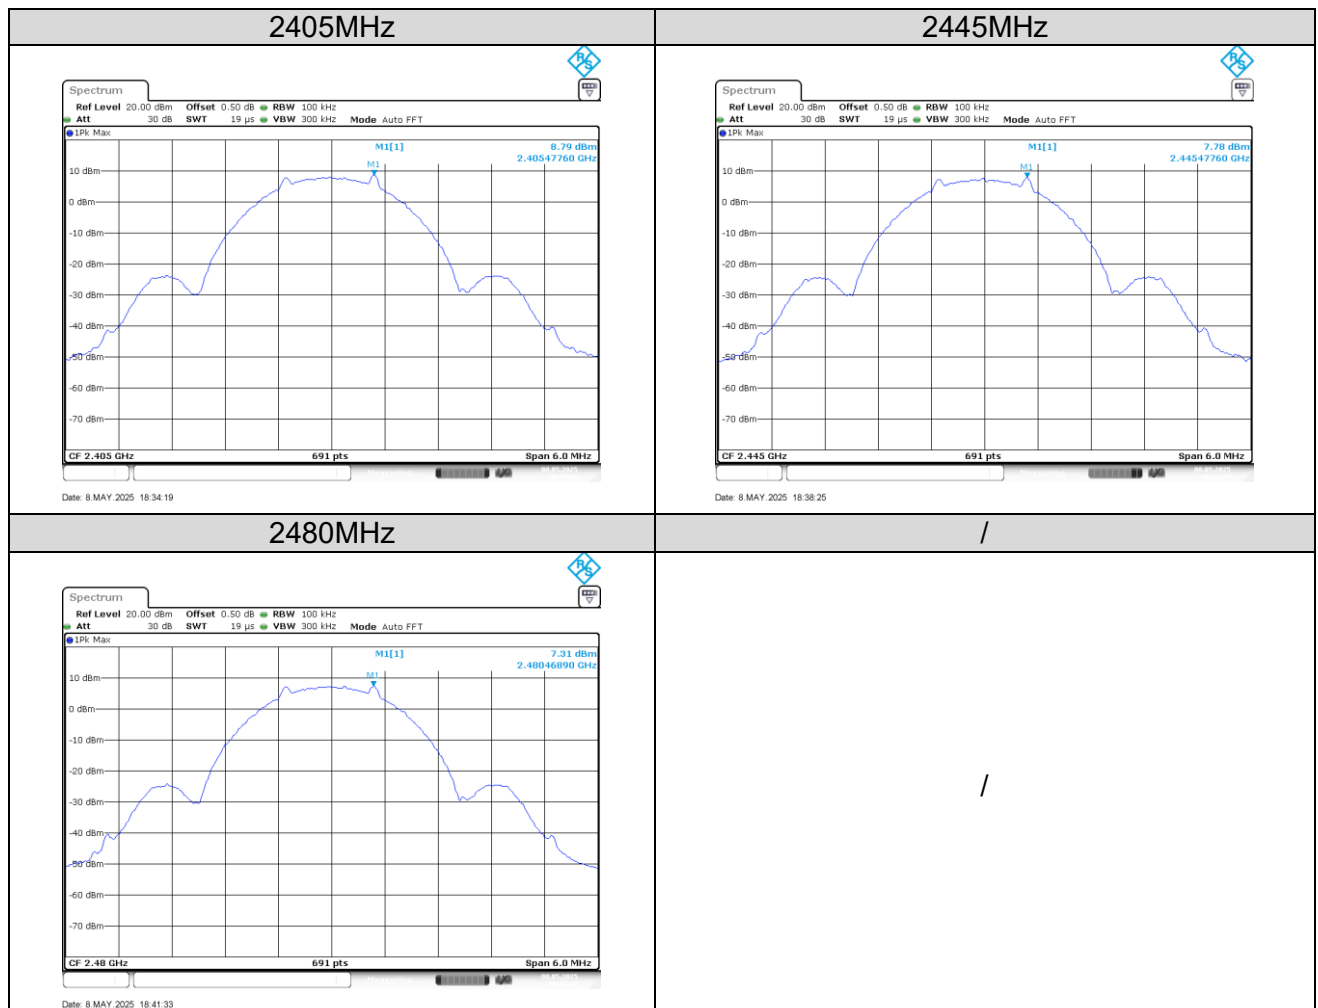


Figure 2: Conducted Spurious Emission

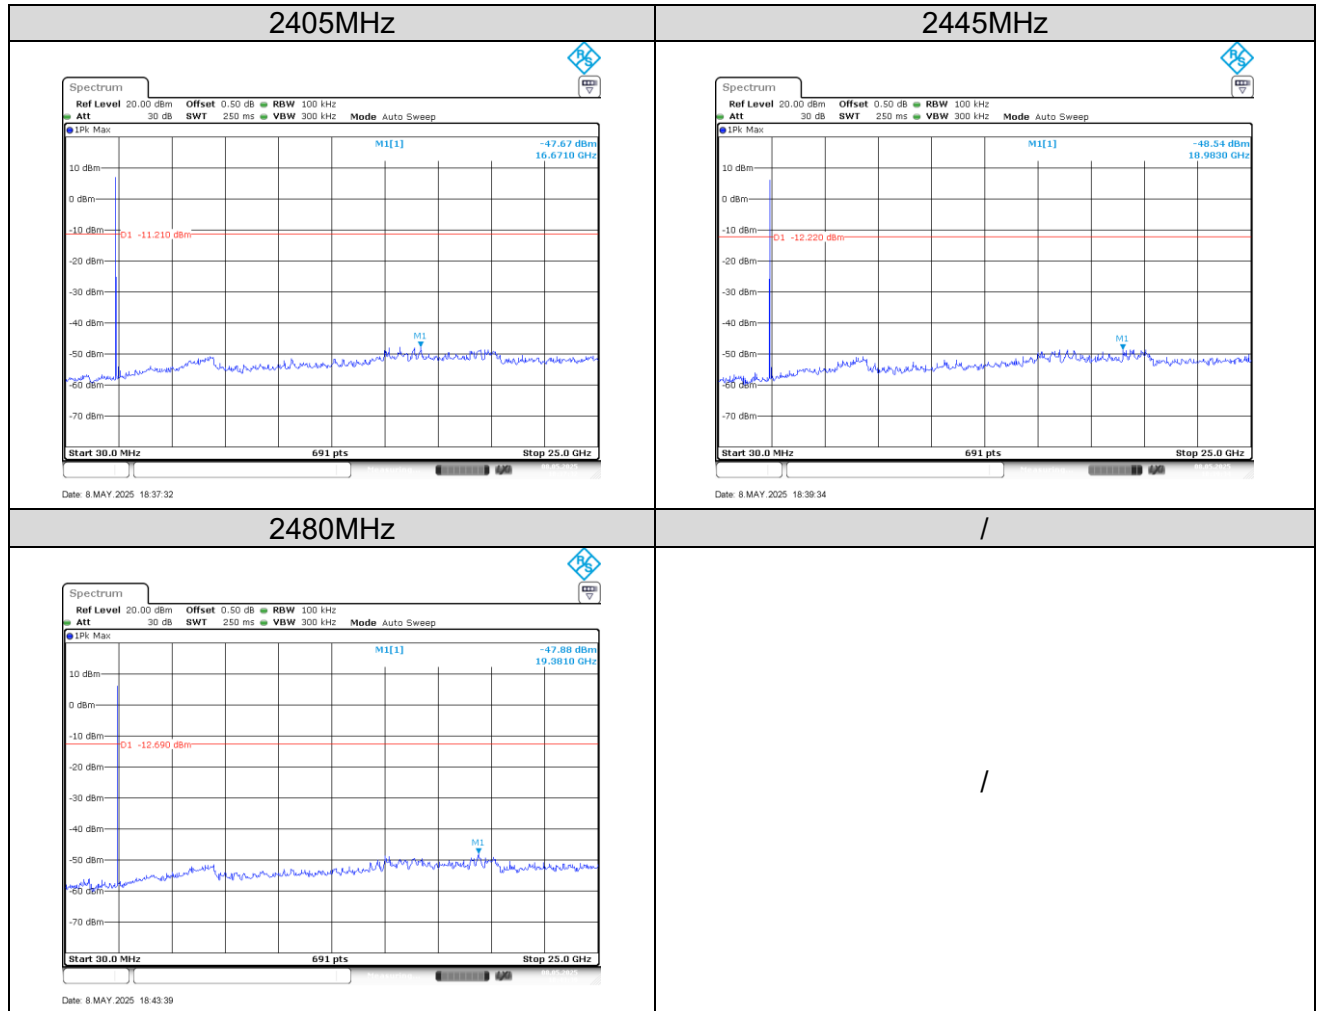
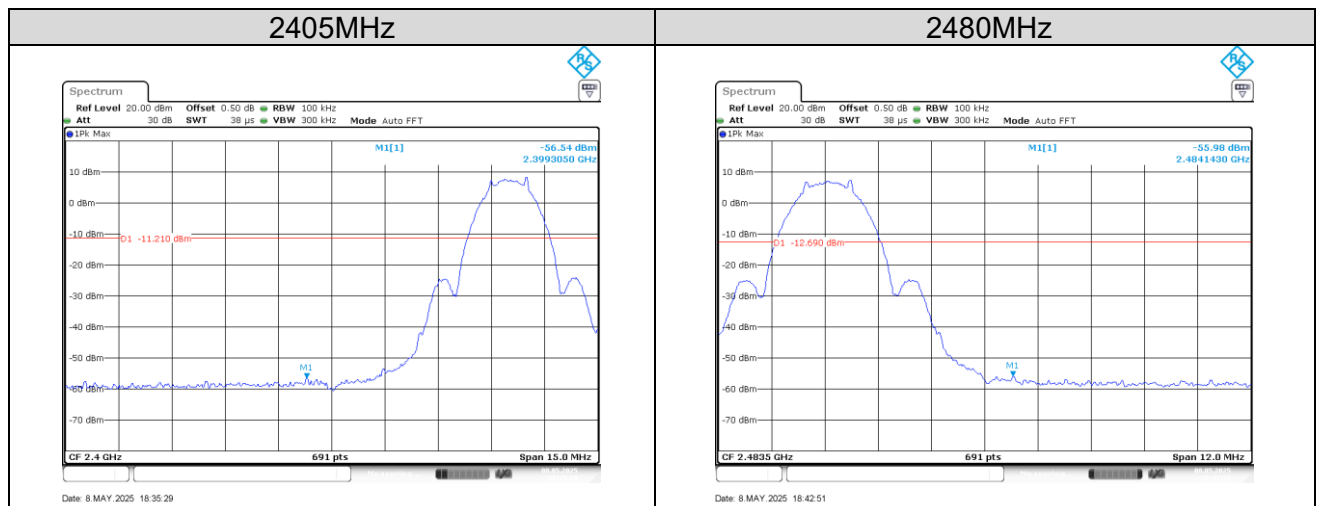


Figure 3: Conducted Band Edge

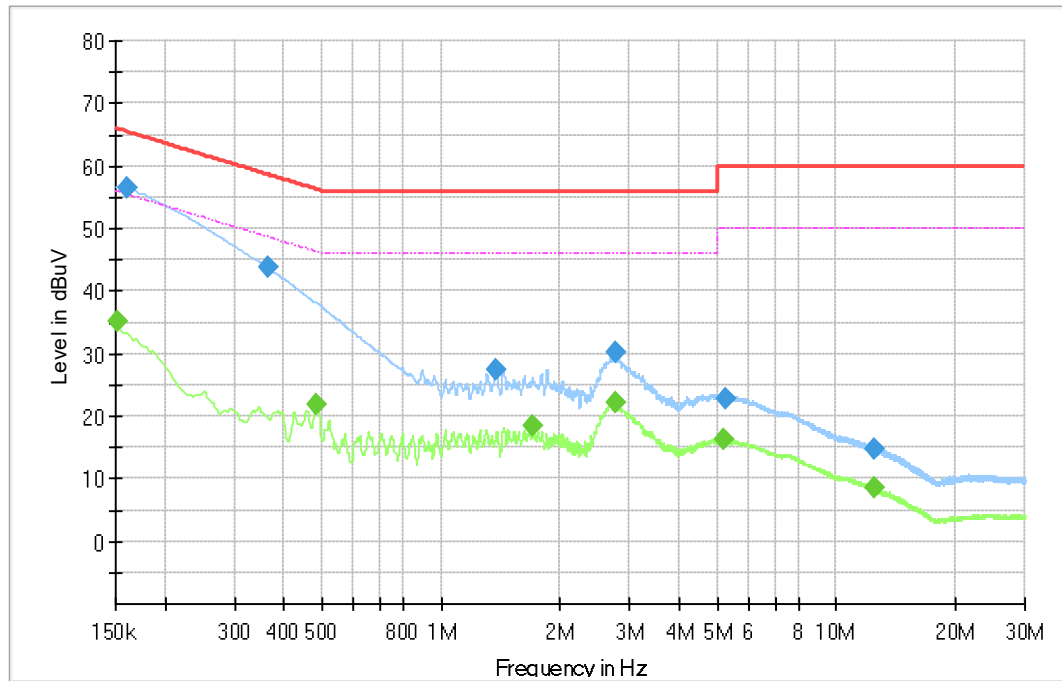


5.2 Emission in the Frequency Range up to 30MHz

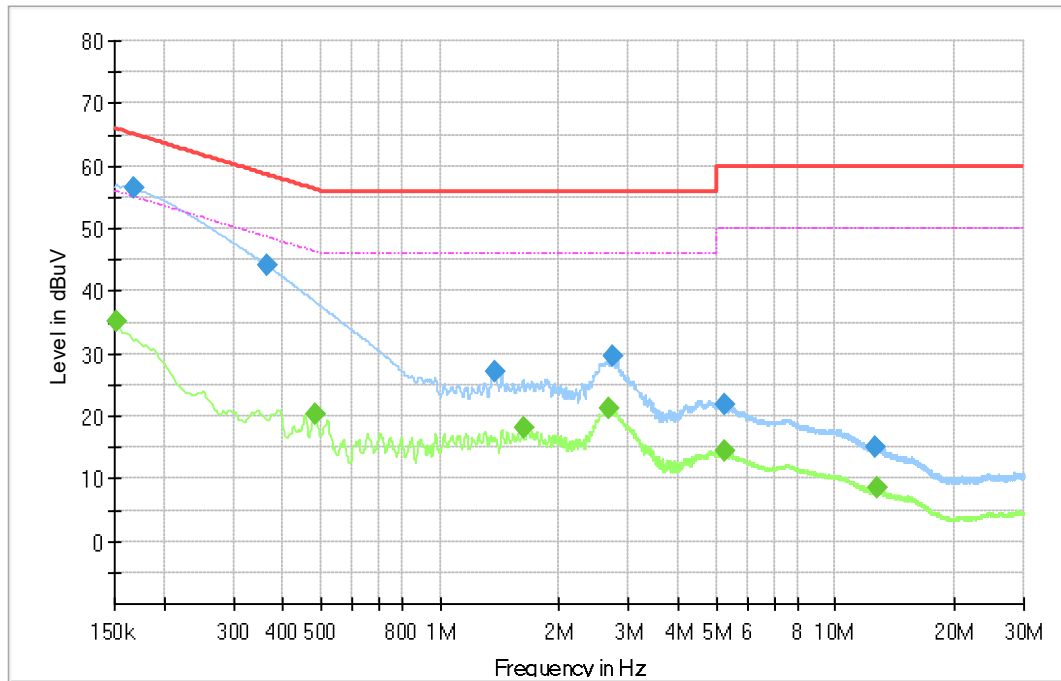
5.2.1 Conducted Emission

RESULT:**Pass**

Date of testing	:	2025-04-10
Ambient temperature	:	22.4°C
Relative humidity	:	50.0%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.207 (a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.8
Test procedure	:	ANSI C63.10:2020 ANSI C63.10-2020+COR. 1-2023+C63.10A- 2024+ERRATA TO C63.10A-2024
Test voltage	:	AC 120V, 60Hz
Test modes applied	:	B

Figure 4: Conducted Emission, L

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.152250	---	34.60	55.88	21.28	L1	10.3
0.161250	56.56	---	65.40	8.84	L1	10.3
0.363750	43.75	---	58.64	14.89	L1	10.3
0.483000	---	21.43	46.29	24.86	L1	10.3
1.376250	27.64	---	56.00	28.36	L1	10.4
1.704750	---	18.05	46.00	27.95	L1	10.2
2.748750	30.07	---	56.00	25.93	L1	10.1
2.755500	---	22.07	46.00	23.93	L1	10.1
5.181000	---	16.30	50.00	33.70	L1	10.4
5.246250	23.25	---	60.00	36.75	L1	10.4
12.414750	---	8.29	50.00	41.71	L1	10.8
12.516000	14.80	---	60.00	45.20	L1	10.8

Figure 5: Conducted Emission, N


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.152250	---	34.65	55.88	21.23	N	10.2
0.168000	56.52	---	65.06	8.54	N	10.4
0.363750	44.17	---	58.65	14.48	N	10.4
0.480750	---	20.10	46.32	26.22	N	10.2
1.369500	27.00	---	56.00	29.00	N	10.4
1.623750	---	17.85	46.00	28.15	N	10.5
2.674500	---	21.09	46.00	24.91	N	10.6
2.726250	29.50	---	56.00	26.50	N	10.6
5.228250	---	14.21	50.00	35.79	N	10.7
5.228250	22.19	---	60.00	37.81	N	10.7
12.554250	15.24	---	60.00	44.76	N	11.1
12.779250	---	8.30	50.00	41.70	N	11.1

5.3 Emission in the Frequency Range above 30MHz

5.3.1 Radiated Band-Edge

RESULT:**Pass**

Date of testing	:	2025-05-22
Ambient temperature	:	23.7°C
Relative humidity	:	55.2%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.247(d) FCC Part 15.205(a) FCC Part 15.209(a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.9 RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.10 RSS-247 Issue 4, July 24, 2025, Clause 6.6
Test procedure	:	ANSI C63.10:2020 ANSI C63.10-2020+COR. 1-2023+C63.10A- 2024+ERRATA TO C63.10A-2024
Test voltage	:	DC 3.3V
Test modes applied	:	A

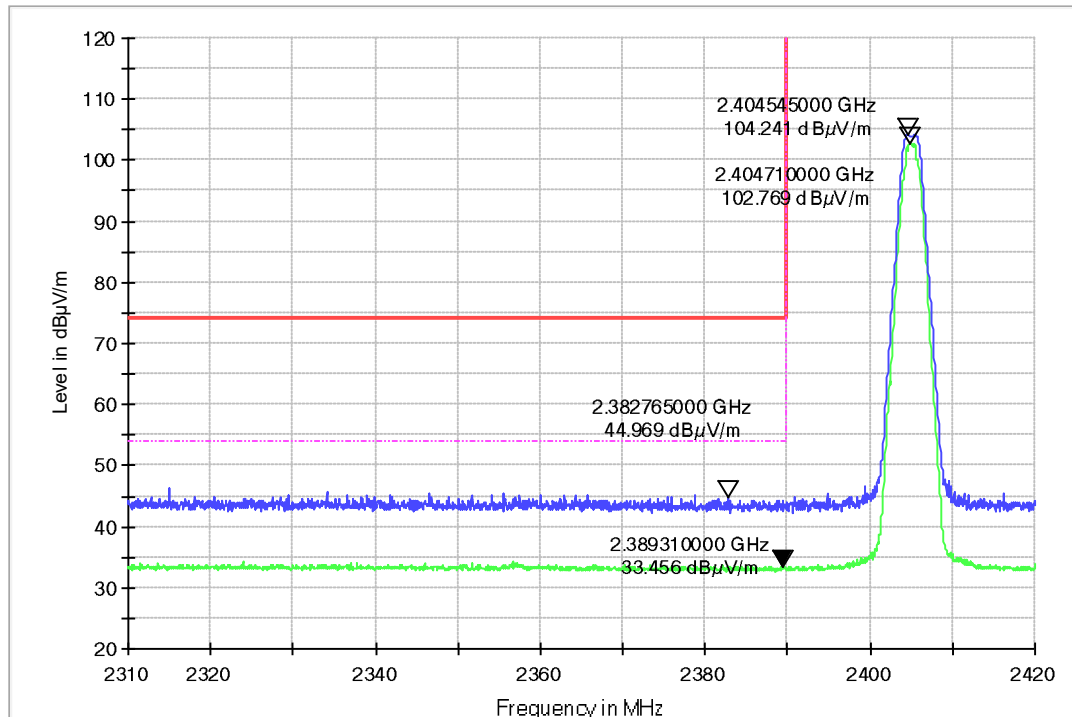
Note:

Trace (Blue): Measured peak value

Trace (Green): Measured average value

Figure 6: Radiated Band-Edge, 2405MHz, H

XXY- 2310~ 2410 BE 1-18GHz_HL050_FSV40_Pre-10-YUNFANG


Figure 7: Radiated Band-Edge, 2405MHz, V

XXY- 2310~ 2410 BE 1-18GHz_HL050_FSV40_Pre-10-YUNFANG

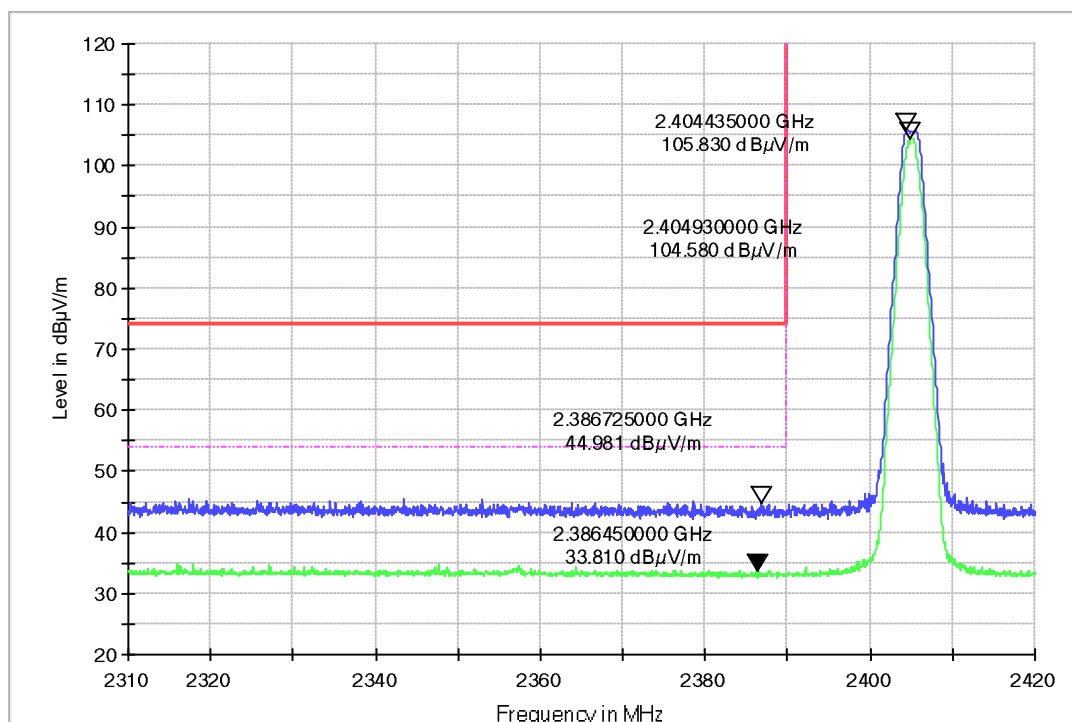
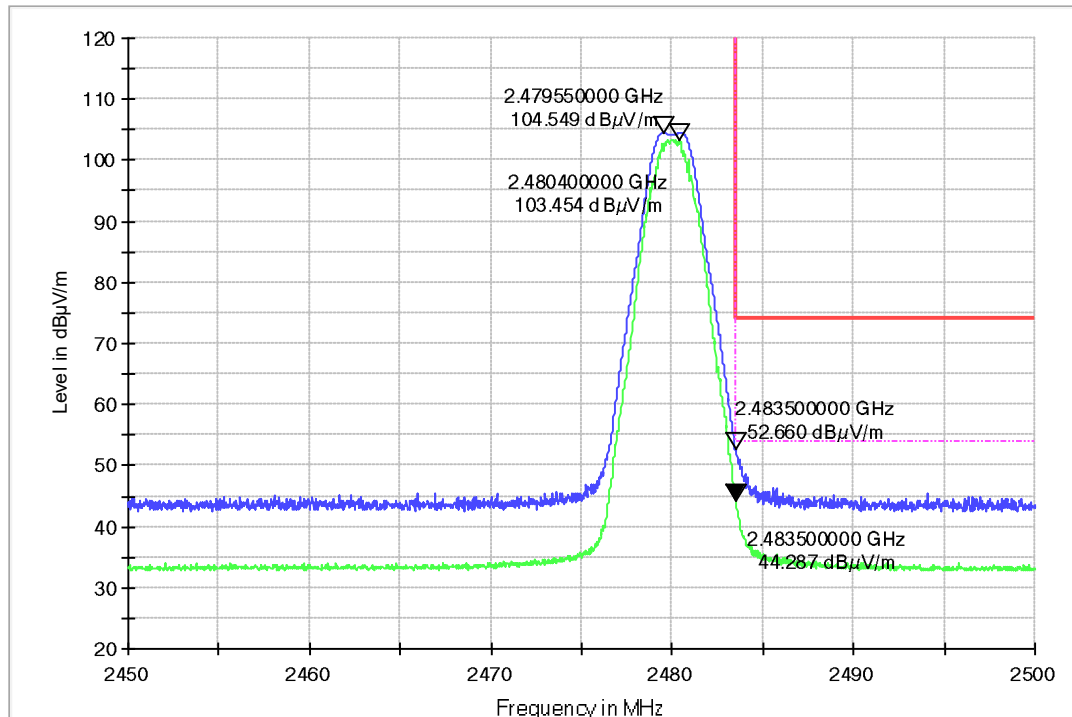
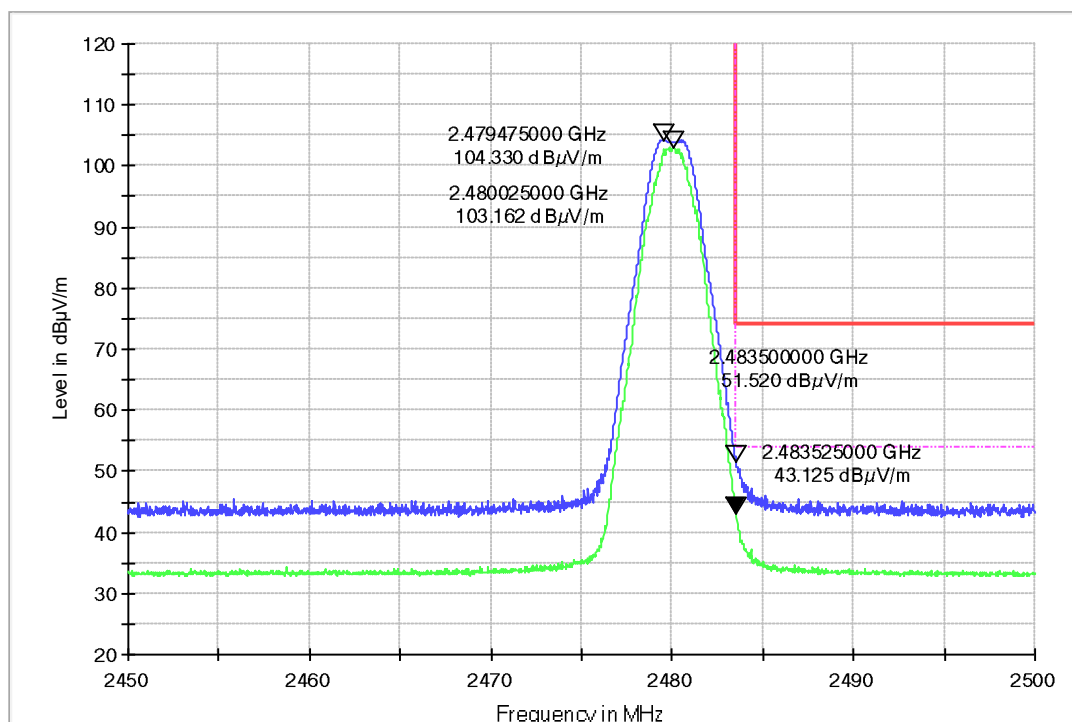


Figure 8: Radiated Band-Edge, 2480MHz, H

XXY-2470° 2500 BE_1-18GHz_HL050_FSV40_Pre-10-YUNFANG


Figure 9: Radiated Band-Edge, 2480MHz, V

XXY-2470° 2500 BE_1-18GHz_HL050_FSV40_Pre-10-YUNFANG

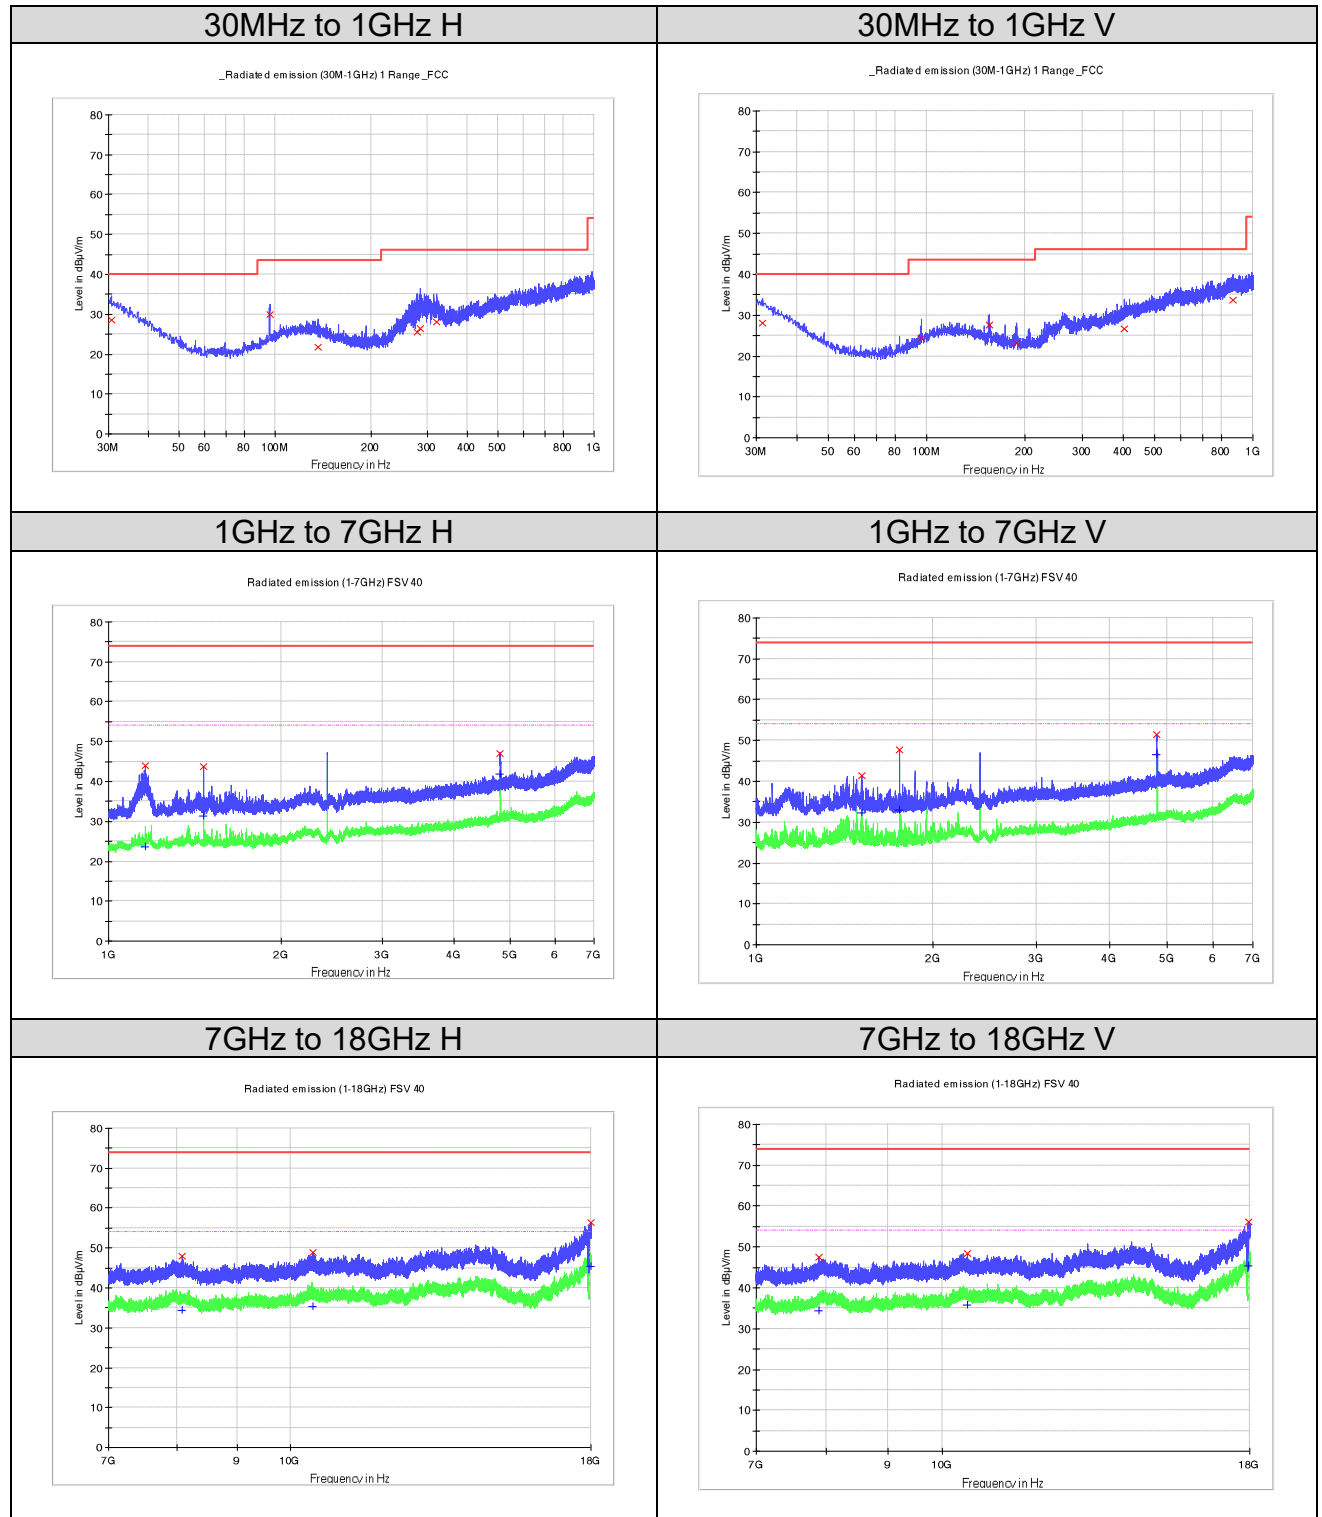


5.3.2 Radiated Spurious Emission**RESULT:****Pass**

Date of testing	:	2025-06-05
Ambient temperature	:	22.9°C
Relative humidity	:	57.6%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.247(d) FCC Part 15.209(a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.9 RSS-247 Issue 4, July 24, 2025, Clause 6.6
Test procedure	:	ANSI C63.10:2020 ANSI C63.10-2020+COR. 1-2023+C63.10A- 2024+ERRATA TO C63.10A-2024
Test voltage	:	DC 3.3V
Test modes applied	:	A

Note:

For the frequency range from 18GHz to 25GHz, no emission was found.

Figure 10: Radiated Spurious Emission, 2405MHz


Limit and Margin
QP

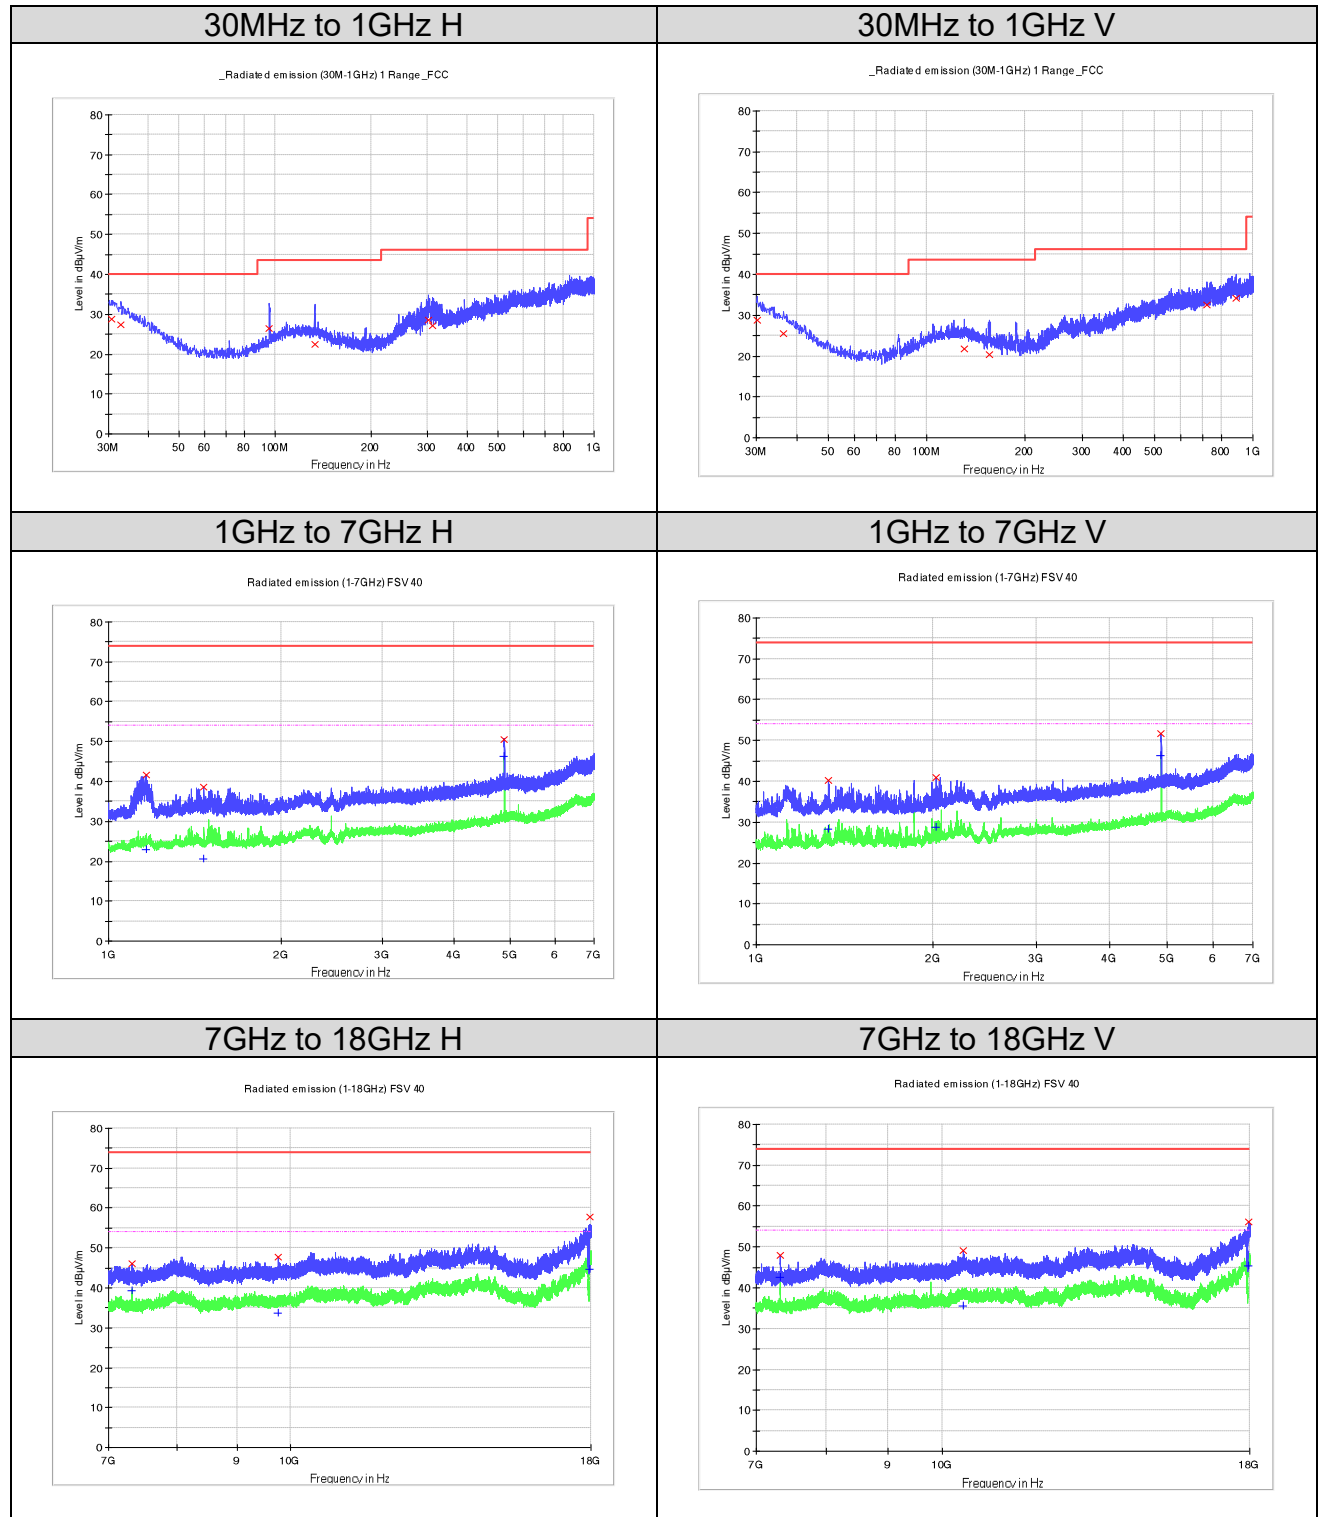
Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.606250	28.6	H	25.1	11.4	40.0
96.081250	30.0	H	16.6	13.5	43.5
136.578750	21.7	H	18.2	21.8	43.5
278.441250	25.4	H	19.7	20.6	46.0
285.231250	26.4	H	19.8	19.6	46.0
320.636250	28.1	H	21.0	18.0	46.0
31.455000	28.1	V	24.6	11.9	40.0
96.081250	24.3	V	16.6	19.2	43.5
155.736250	27.7	V	16.9	15.8	43.5
188.958750	23.1	V	15.8	20.4	43.5
403.207500	26.6	V	23.1	19.4	46.0
870.141250	33.7	V	28.8	12.3	46.0

PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1160.363636	44.0	H	-19.6	30.0	74.0
1462.545455	43.7	H	-18.6	30.3	74.0
4808.909091	47.1	H	-11.2	26.9	74.0
8092.093750	47.9	H	-3.8	26.1	74.0
10442.656250	49.0	H	-1.9	25.0	74.0
17983.156250	56.4	H	11.8	17.6	74.0
1509.454546	41.4	V	-18.7	32.6	74.0
1751.090909	47.6	V	-18.8	26.4	74.0
4811.090909	51.5	V	-11.2	22.5	74.0
7889.281250	47.5	V	-3.9	26.5	74.0
10476.343750	48.5	V	-1.9	25.5	74.0
17970.437500	56.2	V	11.6	17.8	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1160.363636	23.6	H	-19.6	30.4	54.0
1462.545455	31.4	H	-18.6	22.6	54.0
4808.909091	41.9	H	-11.2	12.1	54.0
8092.093750	34.4	H	-3.8	19.6	54.0
10442.656250	35.3	H	-1.9	18.7	54.0
17983.156250	45.4	H	11.8	8.6	54.0
1509.454546	32.3	V	-18.7	21.7	54.0
1751.090909	32.9	V	-18.8	21.1	54.0
4811.090909	46.7	V	-11.2	7.3	54.0
7889.281250	34.4	V	-3.9	19.6	54.0
10476.343750	35.8	V	-1.9	18.2	54.0
17970.437500	45.3	V	11.6	8.7	54.0

Figure 11: Radiated Spurious Emission, 2445MHz


Limit and Margin
QP

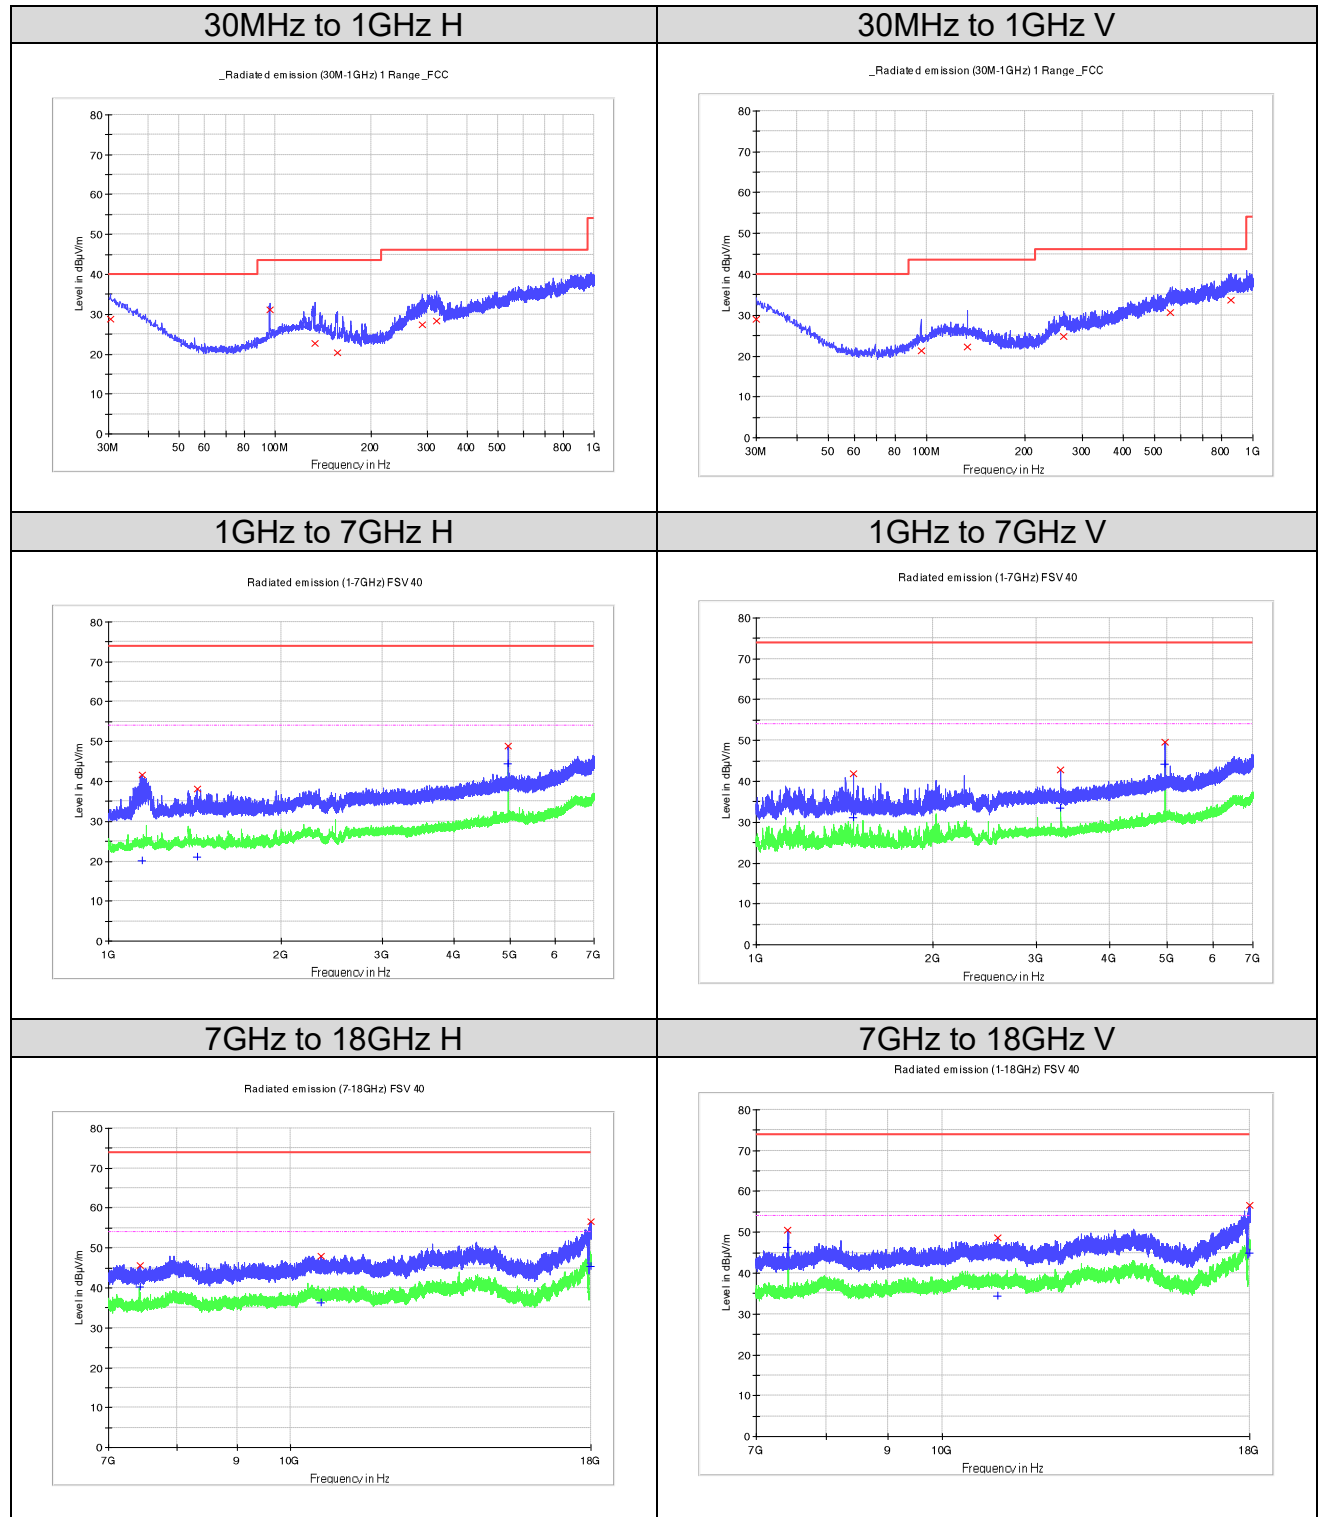
Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.606250	28.7	H	25.1	11.3	40.0
32.788750	27.3	H	23.8	12.7	40.0
95.838750	26.5	H	16.5	17.0	43.5
132.820000	22.5	H	18.4	21.0	43.5
301.357500	28.5	H	20.9	17.5	46.0
310.680000	27.2	H	20.2	18.8	46.0
30.121250	28.9	V	25.3	11.1	40.0
36.426250	25.6	V	21.8	14.5	40.0
130.637500	21.8	V	18.5	21.7	43.5
155.736250	20.3	V	16.9	23.2	43.5
724.035000	32.5	V	28.6	13.5	46.0
885.782500	34.1	V	29.2	11.9	46.0

PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1161.727273	41.7	H	-19.5	32.3	74.0
1466.636364	38.6	H	-18.6	35.4	74.0
4889.090909	50.6	H	-11.1	23.4	74.0
7336.531250	46.0	H	-6.3	28.0	74.0
9765.125000	47.8	H	-3.9	26.2	74.0
17950.156250	57.7	H	11.3	16.3	74.0
1327.818182	40.2	V	-18.7	33.8	74.0
2021.909091	40.9	V	-17.6	33.1	74.0
4889.090909	51.6	V	-11.1	22.4	74.0
7333.093750	47.9	V	-6.3	26.1	74.0
10410.687500	49.2	V	-2.0	24.8	74.0
17980.062500	56.2	V	11.8	17.8	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1161.727273	23.0	H	-19.5	31.0	54.0
1466.636364	20.6	H	-18.6	33.4	54.0
4889.090909	46.4	H	-11.1	7.6	54.0
7336.531250	39.3	H	-6.3	14.7	54.0
9765.125000	33.6	H	-3.9	20.4	54.0
17950.156250	44.7	H	11.3	9.3	54.0
1327.818182	28.4	V	-18.7	25.6	54.0
2021.909091	28.9	V	-17.6	25.1	54.0
4889.090909	46.4	V	-11.1	7.6	54.0
7333.093750	42.7	V	-6.3	11.3	54.0
10410.687500	35.5	V	-2.0	18.5	54.0
17980.062500	45.4	V	11.8	8.6	54.0

Figure 12: Radiated Spurious Emission, 2480MHz


Limit and Margin
QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.363750	28.7	H	25.2	11.3	40.0
96.081250	31.2	H	16.6	12.3	43.5
133.183750	22.8	H	18.4	20.8	43.5
156.585000	20.4	H	16.9	23.2	43.5
288.262500	27.5	H	19.9	18.5	46.0
320.757500	28.3	H	21.1	17.7	46.0
30.000000	29.1	V	25.4	11.0	40.0
95.960000	21.2	V	16.6	22.3	43.5
133.183750	22.2	V	18.4	21.4	43.5
263.406250	24.8	V	21.5	21.2	46.0
557.558750	30.6	V	26.5	15.4	46.0
857.046250	33.7	V	29.0	12.3	46.0

PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1142.909091	41.7	H	-19.7	32.3	74.0
1425.454546	38.2	H	-18.5	35.8	74.0
4960.818182	48.9	H	-11.0	25.1	74.0
7441.375000	45.5	H	-5.8	28.5	74.0
10617.281250	48.1	H	-1.0	25.9	74.0
17990.718750	56.5	H	11.9	17.5	74.0
1465.272727	41.8	V	-18.6	32.2	74.0
3295.000000	42.9	V	-15.0	31.1	74.0
4959.181818	49.6	V	-11.0	24.4	74.0
7438.281250	50.6	V	-5.8	23.4	74.0
11113.312500	48.6	V	-2.4	25.4	74.0
17993.125000	56.6	V	12.0	17.4	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1142.909091	20.1	H	-19.7	33.9	54.0
1425.454546	21.1	H	-18.5	32.9	54.0
4960.818182	44.5	H	-11.0	9.5	54.0
7441.375000	40.1	H	-5.8	13.9	54.0
10617.281250	36.2	H	-1.0	17.8	54.0
17990.718750	45.3	H	11.9	8.7	54.0
1465.272727	31.0	V	-18.6	23.0	54.0
3295.000000	33.5	V	-15.0	20.5	54.0
4959.181818	44.3	V	-11.0	9.7	54.0
7438.281250	46.3	V	-5.8	7.7	54.0
11113.312500	34.4	V	-2.4	19.6	54.0
17993.125000	44.9	V	12.0	9.1	54.0

6. List of Tables

Table 1: List of Test and Measurement Equipment	7
Table 2: Measurement Uncertainty	8
Table 3: Technical Specification of EUT	9
Table 4: Operation Channel List	9
Table 5: Power parameter value	11
Table 6: Auxiliary Equipment	11
Table 7: Antenna Requirement	12
Table 8: Peak Output Power	21

7. List of Figures

Figure 1: Reference level	26
Figure 2: Conducted Spurious Emission	27
Figure 3: Conducted Band Edge	27
Figure 4: Conducted Emission, L	29
Figure 5: Conducted Emission, N	30
Figure 6: Radiated Band-Edge, 2405MHz, H	32
Figure 7: Radiated Band-Edge, 2405MHz, V	32
Figure 8: Radiated Band-Edge, 2480MHz, H	33
Figure 9: Radiated Band-Edge, 2480MHz, V	33
Figure 10: Radiated Spurious Emission, 2405MHz	35
Figure 11: Radiated Spurious Emission, 2445MHz	37
Figure 12: Radiated Spurious Emission, 2480MHz	39